

Axial fans for bathrooms,  
with short tube, to be installed  
in ceiling, wall or window.


## B-MATIC

- With automatic shutter.
- White finish.
- Plastic housing and impeller.
- 230 V, 50 Hz motors, protection **IP-X4**, insulation class **B** and thermal cut out, ambient temperature max. 40°C.
- Neon light sensor in **HUMIDISTAT** and gasket to minimize vibrations.



CODE	MODEL	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum Flow (m <sup>3</sup> /h – l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
<b>TIMER SERIES</b>										
00916000	B-10 MATIC T	●	100	230	2.500	15	98	41	0,7	5
00926000	B-12 MATIC T	●	120	230	2.450	20	190	43	0,9	5
<b>STANDARD SERIES</b>										
00915000	B-10 MATIC	●	100	230	2.500	15	98	41	0,7	5
00925000	B-12 MATIC	●	120	230	2.450	20	190	43	0,9	5
00935000	B-15 MATIC	●	150	230	2.100	25	320	43	1,2	5

### DIMENSIONS mm

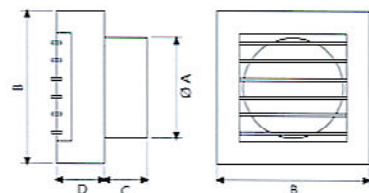

	Ø A	B	C	D
B-10 MATIC	98	150	42	47
B-12 MATIC	118	180	45	56
B-15 MATIC	148	209	60	58

### Versions



**STANDARD**  
In combination with light, fans switches on.



**TIMER**  
Electronic timer adjustable from 3 to 15 minutes.



**HYGRO**  
Adjustable humidity detector from 40% to 90%, and adjustable electronic timer from 40 seconds to 15 minutes.