

Axial fans for bathrooms, very slim, to be installed in ceiling or wall.


B-PLUS

- Very slim, recessed design.
- Plastic housing and impeller.
- 230 V, 50 Hz motors, protection **IP-X4**, insulation class **B** and thermal cut out, ambient temperature max. 40°C.
- Neon light sensor in **HUMIDISTAT** version.



CODE	MODEL	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m3/h – l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
HYGRO SERIES										
00981401	B10 PLUS H	●	100	230	2.500	15	98	41	0,6	10
TIMER SERIES										
00981101	B10 PLUS T	●	100	230	2.500	15	98	41	0,6	10
00982100	B12 PLUS T	●	120	230	2.450	20	190	43	0,8	5
00983100	B15 PLUS T	●	150	230	2.100	25	320	43	0,9	5
STANDARD SERIES										
00990000	B 8 PLUS	●	90	230	2.500	15	70	39	0,57	10
00981001	B10 PLUS	●	100	230	2.500	15	98	41	0,6	10
00981201	B10 PLUS C	●	100	230	2.500	15	98	41	0,6	10
00982000	B12 PLUS	●	120	230	2.450	20	190	43	0,8	5
00983000	B15 PLUS	●	150	230	2.100	25	320	43	0,9	5

DIMENSIONS mm

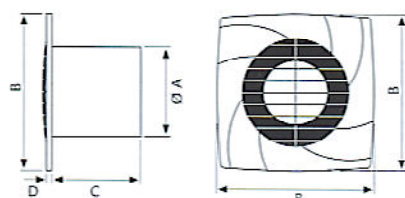

	Ø A	B	C	D
B-8 PLUS	86	140	88	10
B-10 PLUS	98	140	85	10
B-12 PLUS	118	170	100	13
B-15 PLUS	148	190	112	15

Versions



STANDARD
In combination with light, fans switches on.



TIMER
Electronic timer adjustable from 3 to 15 minutes.



HYGRO
Adjustable humidity detector from 40% to 90%, and adjustable electronic timer from 40 seconds to 15 minutes.



PULL CORD
Cord on-off switch