

In line fans with
soundproof box.

BOX IN LINE

IP-44



Box:

- Sheet steel box.
- Thermal and acoustic insulation.
- Inspection door for easy access to motor and maintenance.
- Outlets according current norms and with rubber gasket in order to.
- Mounting feet for easy installation on ceiling of wall.
- Terminal box outside.

Housing:

- High efficient centrifugal fan (polypropylene) with aerodynamical design. (1)

Motor:

- External rotor, IP-44 insulation class B.
- 230V 50Hz/60Hz.
- Speed controlled (not in TIMER versions).
- Maximum working temperature +50°C.

Impeller:


- Forward curved impeller directly mounted on motor shaft.

Accessories:

- Electrical speed controllers REGM.

CODE	MODEL	Speed (r.p.m)	Input Power (W)	max. Amps (A)	AirFlow (m3/h – l/s)	Sound Pressure Level dB(A)	Weight (Kg)
00722000	BOX IN-LINE 100	2.220	0,08	0,65	300	29	6
00723000	BOX IN-LINE 125	2.220	0,08	0,65	420	29	6
00724000	BOX IN-LINE 150	2.450	0,23	1,05	580	38	7
00725000	BOX IN-LINE 200	1.280	0,10	0,75	890	42	9

DIMENSIONS mm

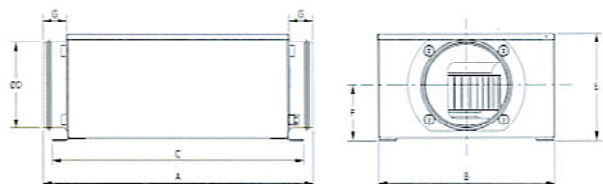

	A	B	C	D	E	F	G
BOX IN-LINE 100	505	285	419	100	166	86	70
BOX IN-LINE 125	445	285	419	125	166	86	40
BOX IN-LINE 150	471	309	439	150	186	96	42
BOX IN-LINE 200	530	404	484	200	246	124	50