

Completely built-in bathroom fans with perimetral and central extraction system, high-performance and low noise level.

SILENTIS / SILENTIS INOX




- Cutting-edge design.
- Backdraught shutters incorporated.
- Front cover easy to dismantle and to clean.
- Plastic housing and impeller and led.
- 230 V, 50 Hz motors, protection IP-X4 insulation class B and thermal cut out, ambient temperature max. 40°C.
- Finishes: White / Stainless Steel.



CODE	MODEL	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m ³ /h - l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
TIMER SERIES										
01071000	SILENTIS 10 T	●	100	230	2.500	15	98	37	0,64	10
01081000	SILENTIS 12 T	●	120	230	2.450	20	190	39	0,85	5
01091000	SILENTIS 15 T	●	150	230	2.100	25	320	41	1,02	5
01071300	SILENTIS 10 INOX T	●	100	230	2.500	15	98	37	0,64	10
01081300	SILENTIS 12 INOX T	●	120	230	2.450	20	190	39	0,85	5
STANDARD SERIES										
01070000	SILENTIS 10	●	100	230	2.500	15	98	37	0,64	10
01080000	SILENTIS 12	●	120	230	2.450	20	190	39	0,85	5
01090000	SILENTIS 15	●	150	230	2.100	25	320	41	1,02	5
01070300	SILENTIS 10 INOX	●	100	230	2.500	15	98	37	0,64	10
01080300	SILENTIS 12 INOX	●	120	230	2.450	20	190	39	0,85	5

DIMENSIONS mm

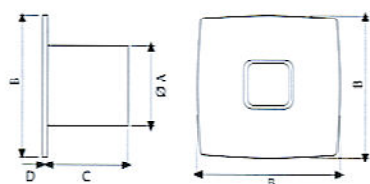

	Ø A	B	C	D
SILENTIS 10	86	140	88	10
SILENTIS 12	98	140	98	10
SILENTIS 15	118	170	100	13

Versions



STANDARD
In combination with light, fans switches on.



TIMER
Electronic timer adjustable from 3 to 15 minutes.