


Helicoidal fans to be installed in walls or windows.

LHV




- Modern design.
- Impeller with low noise profile and high efficiency.
- Window kit included.
- Protection guard on inlet side.
- Series with 230 V, 50 motor, protection IP-44, insulation class I (type 160 IP-X4).
- Speed controlled.
- Working temperature from: -20°C to +50°C.

CODE	MODEL	Ø mm	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m3/h – l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
00660000	LHV 160	160	230	1.750	20	450	40	1,2	1
00661000	LHV 190	190	230	1.500	30	700	42	1,7	1
00662000	LHV 225	225	230	1.150	45	900	44	3	1
00663000	LHV 300	300	230	1.050	50	1.450	47	3,4	1

CODE	MODEL	Ø mm	Voltage (V)	Speed (r.p.m)	Input Power (W)	max. Amps (A)	Maximum AirFlow (m3/h)	Sound Pressure Level dB(A)	Weight (Kg)
00664000	LHV 350	350	230	1.300	100	0,43	1.850	52	4,3
00665000	LHV 400	400	230	1.400	215	0,94	3.150	55	7,4

DIMENSIONS mm

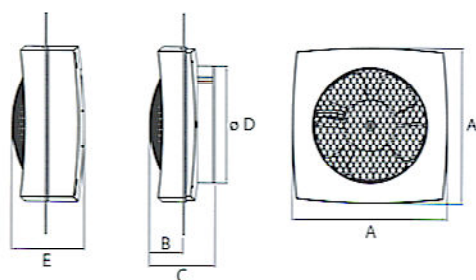

	A	B	C	Ø D	E
LHV 160	210	46	89	160	99
LHV 190	250	54	97	194	109
LHV 225	285	61	110	229	123
LHV 300	370	77	125	315	144