

Bathroom fans with perimeter and central extraction system, high-performance thanks to their cutting-edge and aerodynamic design.

X-MART / X-MART INOX




- Aerodynamic and cutting-edge design.
- **QUICK FIX GRIP**, exclusive mounting system
- Backdraught shutters incorporated.
- Front cover easy to dismantle without using any tools, easy cleaning.
- 230 V, 50 Hz motors, protection **IP-X4** insulation class **B** and thermal cut out, ambient temperature max. 40°C.
- Plastic housing and impeller and led.
- Finishes: White / Stainless Steel.



CODE	MODEL	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m3/h - l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
HYGRO SERIES										
01044000	X-MART 10 INOX H	●	100	230	2.500	15	98	38	0,66	5
01054000	X-MART 12 INOX H	●	120	230	2.450	20	190	40	0,87	5
01064000	X-MART 15 INOX H	●	150	230	2.100	25	320	42	1,04	5
TIMER SERIES										
01011000	X-MART 10 T	●	100	230	2.500	15	98	38	0,64	10
01021000	X-MART 12 T	●	120	230	2.450	20	190	40	0,84	5
01041000	X-MART 10 INOX T	●	100	230	2.500	15	98	38	0,66	10
01051000	X-MART 12 INOX T	●	120	230	2.450	20	190	40	0,87	5
01061000	X-MART 15 INOX T	●	150	230	2.100	25	320	42	1,04	5
STANDARD SERIES										
01010000	X-MART 10	●	100	230	2.500	15	98	38	0,64	10
01020000	X-MART 12	●	120	230	2.450	20	190	40	0,84	5
01030000	X-MART 15	●	150	230	2.100	25	320	42	1,02	5
01040000	X-MART 10 INOX	●	100	230	2.500	15	98	38	0,66	10
01050000	X-MART 12 INOX	●	120	230	2.450	20	190	40	0,87	5
01060000	X-MART 15 INOX	●	150	230	2.100	25	320	42	1,04	5

DIMENSIONS mm

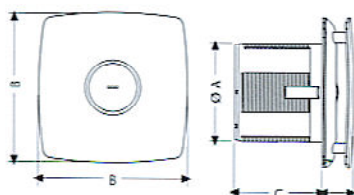

	Ø A	B	C	D
X-MART 10	98	150	89,5	31
X-MART 12	118	170	103,5	32
X-MART 15	148	194	123,5	34

Versions



STANDARD
In combination with light, fans switches on.



TIMER
Electronic timer adjustable from 3 to 15 minutes.



HYGRO
Adjustable humidity detector from 40% to 90%, and adjustable electronic timer from 0 to 15 minutes.