

Refrigeration Cool innovations for 2009





Perfect temperature and perfect taste are very closely connected.

GE understands the importance of freshness in every way.

Which refrigerator is right for you? From our luxury GE Monogram line, to the stylish GE Profile series, to our timeless GE brand – we have the appliance to fit your home and lifestyle. And 2009 is the perfect time to explore GE's refrigerators and freezers. Discover the latest leaps in innovation!

GE Appliances

One of the largest manufacturers of major appliances in the world, GE has been introducing advanced appliances to improve people's lives since 1907. We're continuing that legacy today with energy-conscious innovations that deliver optimal performance. All of our appliances are designed to make every kitchen more functional and more beautiful. GE innovation truly makes life easier ... and better.

100 years

At GE, we ask: "Why predict the future when you can create it?" From our earliest days, our company has used the tools of research, combined with inspiration, to create the world of tomorrow. People have come to rely on the GE brand – and we're excited about what our future holds. 100 years of innovation, style, performance and quality ... and we're just getting started.

GE Refrigeration

GE Refrigeration embraces three brands: GE, GE Profile and GE Monogram. And with a major breakthrough in cooling technology in addition to continually refreshing designs. There's never been a more exciting time for our flagship refrigerators.

GE Refrigeration. As cool as it gets.



GE

Timeless & Dependable. And never complacent. As always with GE, we continue to focus on product innovation – striving to develop the products that the most discerning consumers demand.



GE Profile

The Marriage of Style & Innovation. GE Profile appliances offer the latest kitchen technologies, combined with the best in contemporary design and a selection of colours.



PTE25SBTSS





GE Monogram

American performance with a decidedly bold appearance. GE's Monogram appliances enhance your home with a subtle, yet striking, stainless steel elegance. Creating an atmosphere of inspired entertaining and relaxed living, our Monogram products constantly impress those consumers who simply want the best in refrigeration design and performance.









75EB420DW

A century of excellence, with fresh ideas every day ...

Design and Appearance

First of all, choose among free-standing, built-in or custom panel models. Colour can include a textured, high-gloss, metallic or stainless steel look (with the GE CleanSteel option that never shows fingerprints). Bright, easy-to-use color LCD or LED controls provide a high-tech appearance for all your refrigerator functions. Dramatic touches – including bevelled doors, hidden hinges and sculptured stainless handles – complete the design's sophistication.

Convenience and Capacity

Great storage capacity – up to 840 litres – and two case depth options (61 cm or 72 cm) for greater convenience. Enjoy better tasting water with the easy-to-remove GE water filtration unit. A Refreshment Centre door option provides easy external access to foods stored inside the refrigerator door. If you like your beverages cold, the electronic beverage centre accommodates containers of all sizes and chills beverages to the icy cold temperature of 1.1°C.

Authentic American Style Refrigerator

GE's long tradition in building refrigerators has provided us with nearly a century of knowledge and experience. A proud example from our history: in 1927, the Electric Refrigeration Department began producing the 'Monitor Top' hermetically sealed refrigerator. Its all-steel cabinet was a GE innovation. Other pioneering firsts – like an ice dispenser through the door on the side-by-side model – have made GE a household name around the world.

High-tech 'Food Preservation'

How do GE refrigerators preserve food longer and better than other refrigerators? A few key elements: the ClimateKeeper System – with precise digital controls, electronic sensors and a multi-flow air tower – manages temperatures to keep vegetables garden fresh longer. The advanced ClimateKeeper2 technology, with its unique dual-evaporator system, also protects ice from odour transfer. CustomCool technology chills in minutes, thaws in just a few hours, and even allows you to select individual temperature settings for meats, fruits and vegetables.

Quality

GE is committed to providing the highest standard of quality in the industry. How? First of all, by using high-quality materials exclusively. Our stainless models are made of high-grade stainless steel, and most exterior surfaces that have painted finishes are made of galvanized steel to improve corrosion resistance. Before being placed in the refrigerator, GE's door gaskets must pass a 1 million cycle life qualification test. In addition, the inner doors are made of ABS plastic, which greatly improves food hygiene and impact resistance in comparison to HIPS plastic (the material used in standard refrigerators). Most of all, the quality of GE's refrigerators comes from the expertise and the tradition of excellence that GE has developed diligently over the past century.

Imagination at work

GE is imagination at work. GE people worldwide are dedicated to turning imaginative ideas into leading products and services. For over a century, we've been focusing on the future and constantly reinventing ourselves. Innovative in the way we work, we are especially adept at managing change to create momentum and drive. At GE, we believe that 'What we imagine ... we can make happen'.



The broad range of GE side-by-sides demonstrates GE's leadership in refrigeration technology. The stylish exterior makes a dramatic statement, and the multi-level interior makes versatile use of storage space. In addition, both refrigerator and freezer compartments offer a range of cooling capabilities for the ultimate in flexibility and performance.*

Side-by-Side



ClimateKeeper2 dual evaporator system

The ClimateKeeper2 dual evaporator system carefully manages temperature with higher humidity in the fresh food compartment to keep foods garden fresh longer. Cycles air in the refrigeration and freezer compartments separately, preventing the transfer of fresh food odours to the frozen foods. Reduces defrost cycles to help keep frozen foods at their best.



Day 5: Fruit pulp is losing moisture and rinds are shrivelling.

COS

ClimateKeeper2:

Day 5: Still fresh and juicy, slices stay bright and moist.

Inverter compressor

The variable speed compressor makes our refrigerators more efficient – decreasing energy consumption and damping sound.

Metallic-look series with CleanSteel feature

Available in shades of aluminium, stainless steel and graphite, the doors shine like stainless steel with a laminated surface – but they're actually made of electro-galvanised steel bonded with zinc (an innovation GE introduced in 2007). So, unlike stainless steel, this surface holds magnets. And thanks to the magical innovation of the CleanSteel feature, it doesn't fingerprint and is very easy to keep clean.



but without the fingerprints

and with the ability to hold

magnets.

The magic touch ... of the CleanSteel feature.

External electronic control

This handy feature enables you to control all the functions of the refrigerator – including the temperature settings – without opening the doors. Saves energy and is so easy to use!





St. Reason	Contra City
-17*C	River and A
0	OFTEN P

'A' energy

Most of the new GE refrigerators are classified 'A' energy. So you can have cutting-edge technology and advanced options for preserving foods, while saving on your energy bill.





TurboCool feature (1)

Quickly cools back down to the set temperature when the door has been open for an extended time or when hot foods have been placed inside.



GE Water filtration (2)

Removes impurities, providing your family with fresh-tasting, filtered water all day long. The new 'slim' version optimises use of the refrigerator space.



Slide'n Store full-extension 3 freezer baskets

Deeper design maximises storage space and flexibility and ensures easy access to frozen foods.



Slide-out, spillproof glass (4) shelves

These adjustable shelves make clean-up easier by containing spills within the shelf surface.







the defrost cycle.

FrostGuard Technology

when it's necessary to defrost.

Monitors door openings to calculate

Also activates a pre-chill function to

lower the freezer temperature prior to

QuickSpace shelf Creates extra storage space for

tall items such as flowers, special desserts, and bottles.

(8)

(7)

Full-extension bin with CustomCool technology Chills in minutes, thaws in hours and helps keep foods fresher, longer. For added convenience, it opens fully to allow easy access.



Integrated Ice system

9

Designed to supply you with plenty of ice, while giving you more room to store your favourite fresh foods.

UltraFlow¹⁰⁰

1 minute.

10 AutoEnergy Saver Reduces operation cycles to save energy and expense.

Quench your thirst by dispensing

100 ounces (ca. 3 litres) of water in



12 PreciseFill technology Just select the desired measurement and let PreciseFill do the work.



are available on all models. Please see the product specifications for details

Bottom-Freezers provide easy access and convenience. The most frequently used items are within easy reach, sparing your back and knees, making the bottom-freezer a most ergonomic choice! Full-width fresh food storage, combined with the ClimateKeeper system to keep temperatures consistent and foods fresh.*

Bottom-Freezer

Design and Appearance

- > ClearLook storage: allows easy viewing of refrigerator contents, while giving the interior a brighter, more open appearance.
- > BrightSpace interior lighting: the interior glows with this exceptional lighting, making foods easy to see.
- > 2 or 3 doors option, 61cm or 72cm case depth, built-in or free-standing.
- > High-gloss look.

Food preservation

- > Electronic digital controls with actual temperature display.
- > Electronic sensors monitor temperatures constantly for accuracy and consistency.
- > Multi-flow air tower: delivers cold air throughout the interior for even cooling.
- > TurboCool feature: quickly cools the refrigerator after frequent door openings or when hot items are placed inside.

Convenience

- > Energy saver: activating the energy saver feature puts the refrigerator in high efficiency mode to save energy.
- > Secure-close door system: securely pulls the door closed automatically, even after you release the handle. Door alarm and child lock.
- External water dispenser with GE SLIM water filter: provides chilled, filtered water and displays the refrigerator's internal temperature. The refrigerator temperature can be controlled without even opening the door.



- > Complete line-up, with or without dispenser. 2 case depths available (61 cm or 72 cm) for greater storage capacity.
 3 colours.* 2 or 3 doors. Built-in or free-standing installation.
 Also available with a factory-installed trim kit to accommodate custom panels that match the kitchen cabinets.
- > Great storage capacity: from 635 to 760 litres.
- > Stylish appearance.
- > A-energy with AutoEnergy saver.
- ClimateKeeper system combines digital controls, electronic sensors and a multi-flow air system to maintain a constant fresh food climate.

* Ask your local distributor for customised colour options.

10



Adjustable temperature 1 deli drawer Provides a temperature-controlled, easy access environment for fresh



Slide-out, spill-proof 2 glass shelves

foods.

Provide storage flexibility, ease of use and quick clean-up – benefits every consumer appreciates.



Electronic touch controls with 3 digital temperature readout Enables better temperature management and more accurate



temperature settings. ShelfSaver beverage rack





5

(6)







Multi-level Slide n' Store freezer drawers In the freezer compartment there are 3 full extension drawers for easy access to all frozen food items.

Adjustable ClearLook

Hold large containers with style

Adjustable humidity crispers Provide the ideal storage environment, keeping fruits and vegetables crisp and fresh.

FrostGuard technology

foods. Saves energy.

Stainless steel trim.

Reduces freezer burn and retains

the quality and flavour of frozen

gallon door bins

and ease.

NEW (in 2009)

9





Integrated ice-maker 11

constant fresh food climate.

Ice is easy to access directly from the ice bin.

multi-flow air system to maintain a

'A' Energy 12

You can have cutting-edge technology and advanced options for preserving foods, while saving on your energy bill.



are available on all models. Please see the product specifications for details.

GE slim water filter

Our slim water filter will remove chlorine, lead, cysts, mercury, and many other contaminants. By reducing contaminants and odors, we have cleaner and better tasting water and ice. Dual-level lighting system, FrostGuard technology, adjustable humidity crispers, ShelfSaver beverage racks – Top-Freezers have so many impressive features! Those models are also available in stainless steel.

Top-Freezer

Design and Appearance

- Rounded doors and low-profile hinges accent an appealing, contemporary design.
- > Up-front dual-level lighting provides greater visibility.
- > Freezer dome light distributes light evenly in the freezer.
- > ClearLook storage: allows easy viewing of refrigerator contents, while giving the interior a brighter, more open appearance.

Food preservation

- > Electronic digital controls display current temperature, eliminating guesswork in setting refrigerator temperatures.
- > Electronic sensors constantly monitor temperatures for accuracy and consistency.
- > Multi-flow air tower: delivers cold air throughout the interior for even cooling.
- > FrostGuard technology reduces freezer burn and saves energy.

Convenience

- > Electronic ice-maker ready (IM4A): easy-to-add ice maker accessory provides cubed ice.
- > Fruit and vegetable crispers with adjustable humidity: provide the ideal storage environment, keeping fruits and vegetables crisp and fresh.
- > Adjustable slide-out, spill-proof shelves: provide storage flexibility, ease of use and quick clean-up – benefits every consumer appreciates.
- > Locking tilt-out freezer door bin: allows maximum storage while also allowing crowded foods to be removed easily.





For consumers looking for small-size appliances, GE offers a variety of compact fridges from 2 to 5 cu ft storage capacity. In addition, upright freezers until 20 cu ft complete the vast line-up of GE refrigeration. While these "Specialty" products may not have all the high-end features found in our full-size products, they do excel where it really counts: quality design and performance.

Upright Freezers

- > Available with 17 or 20 cu ft storage capacity.
- > Upfront controls.
- > Adjustable shelves.
- > Reversible doors.

Compact Fridges

- Available in 2, 3 or 5 cu ft storage capacity.
 Available in white enamelled or black enamelled, with stainless steel doors

"Specialty" Upright Freezer **Compact Fridge**





Refrigeration technology is just one of GE's innovative strengths. We also design leading appliances for cooking, laundry and air conditioning. Ask your local distributor for the other brochures in this series.

Cooking

Choose from electric or microwave ovens, cooktops, hoods and ranges. More style, versatility, performance and electronic control. Isn't it time to enjoy more of what you want? GE cooking appliances have it all.

Laundry

A wide choice of washers, dryers and washer-dryer combos. All with great capacity, durability and ease-of-use. Plus, just like every GE product, the highest standards of quality, performance and reliability.

Air Conditioning

From room air conditioners to dehumidifiers, GE offers a wide range of models and styles for your living comfort – all of them energy-efficient and full of advanced climate-control features.



The product sheet at the back of this brochure contains the specifications for the refrigeration appliances.

How to choose your refrigerator?

Choose the type that best fits your needs and fulfils your desires: a refrigerator with freezer on top, on bottom, or side-by-side.

Choose the model by considering the capacity and the specific features. The model number indicates the capacity in cubic feet (1 cubic foot = about 28 litres). Side-by-side and bottom-freezer models are available in two case depths: 61 cm or 72 cm. Note that the "case depth" is the depth of the unit without the doors (i.e., the part of the unit that should be built into the kitchen cabinetry).*

Choose the colour:

WW for white, BB for black, SS for stainless steel doors & handles, etc.**

* Note that not all features are available on all models. Please see the drawings in the technical specifications for details.

** Ask your local distributor for additional colour options.

GE Appliances Europe-Middle East-Africa Kouterveldstraat, 2 B-1831 Diegem Belgium

www.geappliances-europe.com info.geappliances-europe@ge.com GE has a policy of continuous improvement of its products and reserves the rights to change materials and specifications without notice. The specifications on the rating plate of our product are accurate. All photographs shown in this catalog are non-contractual.

© 2008 General Electric Company

Dealer:			



GE imagination at work

GE / GE Profile Side-by-Side Refrigerator Feature Gallery



Contoured doors and sculptured handles reate a dramatic effect and complement jour desire for a sophisticated look.



CleanSteel feature

Thanks to the magical innovation of the CleanSteel feature, it doesn't fingerprint and is very easy to keep clean.



Color LCD display LCD controls are easy-to-see and

easy-to-use for all of your refrigerator functions. Choose among 8 different plors and personalise the display of your vn refrigerator!



LightTouch! Tall dispenser Accommodates tall glassware and dispenses water and ice at the touch of a finaertip.



PreciseFill technology (in 2009) ust select the desired measurement and PreciseFill do the work.



UltraFlow100 NEW in 2009 Quench your thirst by dispensing 100 ounces (ca. 3 litres) of water in 1 minute.



urboCool setting cools the refrigerator after frequent



oor openings.



uicklce setting ikes ice up to 50% faster than normal ngs - ideal for entertaining.



* Note that not all features are available on all models. Please see the product specifications for details.

External electronic control ou can control all the functions of the igerator - including the temperature ettings - without opening the doors. aves energy and is so easy to use! New ass-touch and tactile version available.



rostGuard technology otects frozen items from freezer burn monitoring freezer door openings and defrosting only when needed.

ClimateKeeper2 system

hroughout the refrigerator.

Dual evaporator system creates two

compartment and a separate one for

he freezer-to help maintain freshness

separate climates-one for the fresh food



aller containers are a snap with a quick slide of the retractable shelf.

In-the-door beverage rack

out of the way.

Conveniently stores beverage cans

Beverage Center Right temperature, right now. Now your



GE water filtration (in 2009) Removing impurities adds a fresher taste





Enjoy cold drinks in less time. The CustomCool ExpressChill setting chills cans, bottles and 2-litres in minutes, not

at just the right temperature.





Be ready to cook when you get home from work. The CustomCool ExpressThaw setting thaws meats and poultry in hours, not days, so you'll spend less time planning for meals.

CustomCool SelecTemp Keeps meats, fruits and vegetables cool





Full-extension CustomCool bin he full-extension CustomCool bin opens vide to make loading and unloading quick and easy.

and crisp. The CustomCool SelecTemp

setting creates the ideal environment maintaining freshness by controlling

nperature and airflow.



GE imagination at work

GE Appliances Europe-Middle East-Africa Kouterveldstraat, 2 Belgium

www.geappliances-europe.com info.geappliances-europe@ge.com



Com

1 THE

107 W

1.00

1. I

Adjustable ClearLook door bins ransparent fronts make finding your avorite door items quick and easy.

Slide-out, spillproof glass shelves

Raised edges and slide-out shelves keep

Designed to give you more room to store

Deeper design maximises storage space

nd flexibility and ensures easy access to

small spills from becoming big messes.

Integrated Ice system

your favourite fresh foods.

Slide'n Store full-extension

freezer baskets

rozen foods.













GE has a policy of continuous improvement of its products and reserves the rights to change materials and specifications without notice. The specifications on the rating plate of our product are accurate. All photographs shown in this catalog are noncontractual.

© 2008 General Electric Company

GE Appliances

Refrigeration Side-by-side (case depth of 61 cm)

Technical Specifications Accompanies the Refrigeration 2009 brochure






Side-by-side (61 cm) Technical Specifications	GE	GE	F	GE	GE	GE	GE	GE	GE	GE	GE	GE PROFILE	GE PROFILE	NEW (in 2009) GE PROFILE	E PROFILE	NEW (n 2009) GE PROFILE	NEW (in 2009) GE PROFILE	NEW (in 2009) GE PROFILE
MODEL N°	GCE21MGTFBB GCE21MGTFWW GCE21MGTFSS	GIE21MGTFBB GIE21MGTFKB * Mirror and par	GIE21LGWFBB GIE21LGWFKB	GCE21LGWFBB GCE21LGWFWW GCE21LGWFSS	GCE23LHWFSS GCE23LHWFWW GCE23LHWFBB	GCE23LGWFSS GCE23LGWFWW GCE23LGWFBB	GCE23LGTFAV	GCE23LGTFLS	GCE23LGTFBG	GCE23LBWFWW GCE23LBWFBB	GWE23LGTFSS	PCE23NHTFSS PCE23NHTFBB PCE23NHTFWW	PCE23TGXFSS PCE23TGXFWW	PCE23VGXFSS PCE23VGXFWW PCE23VGXFBB	PIE23VGXFSV	PHE25TGXFBB	PHE25YGXFWW PHE25YGXFBB	PJE25YGXFSV PJE25YGXFKB
ISO CAPACITY (GROSS / NET) Totol (litres)	648 / 536	648 / 536				671/578	671/578	671 / 570	671 / 570	688 / 604	671/578		671/667		671/537	718 / 563	710 / 540	710 / 540
Fresh food (litres) Freezer (litres)	400 / 371 248 / 165	400 / 371 248 / 165	648 / 552 400 / 377 247 / 174	648 / 552 400 / 377 247 / 174	671 / 578 418 / 396 253 / 182	418 / 396 253 / 182	418 / 396 253 / 182	671 / 578 418 / 396 253 / 182	671 / 578 418 / 396 253 / 182	418 / 396 269 / 208	418 / 396 253 / 182	622/488 408/379 214/109	671/557 418/388 253/169	671/537 418/375 253/162	418/375 253/162	447 / 399 272 / 164	718 / 548 447 / 395 272 / 154	718 / 548 447 / 395 272 / 154
FRESH FOOD FEATURES Beverage center	-														-			
Refreshment center ClimateKeeper system	•	•	-	-	•	1	-	-	-	:	-	•	•	•	•	ClimateKeeper2	ClimateKeeper2	ClimateKeeper2
Dual Evaporator Multiflow air system	•	•	-	-	-	-	-	-	-	-	-	•	•	-	-	•	•	•
Actual Temperature Display Temperature Control Electronic sensors	External temp set display	External temp set display	External temp set display	External temp set display	- External temp set display	External temp set display	External temp set display	External temp set display	- External temp set display	Dual wheel	External temp set display	Upfront Temp Controls	External - Tactile	• External - Touch Control	External - Touch Control	External - Tactile	Color LCD Controls	Color LCD Controls
TurboCool setting SmartWater filtration system	- Plus	- Plus	• - Plus	• - Plus	• - Plus	- Plus	• Plus	• - Plus	• - Plus		- Plus	Plus	• • Plus	• • Dluc	Plus	• Plus	Plus	• Plus
LightFouch! dispenser Integrated (Trimless) Dispenser	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	:	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water
Precise Fill UltraFlow100	-	-	-	-	-	-	-	-	-	-	-	-	-	:	•	-	:	
Dispenser Light Child lock	•	•	:	:	:	:	:	:	:	-	:	•	LED •	LED •	LED	LED	LED •	LED •
Door alarm Quick Ice feature Water filter indicator light	-	•	-	•	-	•	-	-	-	-	-	•	•	•	•	•	•	
Cabinet shelves Adjustable	3 Glass 3	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass 3	3 Glass	3 Glass	3 Glass	3 Glass 3	3 Glass 3	3 Glass	3 Glass
Slide-out, spillproof QuickSpace shelf	3	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2
Integrated shelf support system Snugger clip(s)	• - 1	•	•	•	•	•	•	•	•	•	-	2	2	2	2	2	2	• 2
Bottle Retainer(s) 3-Stack drawer system Deli drawer	Adj. Temp.	Adj. Temp.	-	-	-	-	-	-	-	-	-	ے • Adj. Temp.	Adj. Temp.	2 • Adi Tamp	Adj. Temp.	• Adi Tamp	- • Adi Tamp	- • Adj. Temp.
Vegetable/fruit crisper Sealed drawer	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity	Adj. Humidity, CustomCool w/full-extension	Adj. Humidity, ExpressChill w/full-extension	Adj. Temp. Adj. Humidity, CustomCool w/full-extension	Adj. Humidity, CustomCool w/full-extension	Adj. Temp. Adj. Humidity, ExpressChill Full-extension	Adj. Temp. Adj. Humidity, CustomCool w/full-extension	Adj. Humidity, CustomCool w/full-extension
ClearLook door bins Dairy compartment (removable)	4 (3 Adj.)	4 (3 Adj.) •	4 (3 Adj.)	4 (3 Adj.)	3 (1 Adj.) •	4 (3 Adj.)	4 (3 Adj.) •	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.) •	3 (1 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	5 (4 Adj.)	4 (3 Adj.)	4 (3 Adj.)
Beverage rack Wine Caddy Integic light surface	- - Dual laval	- - Dual laval	- - Cinala	- -	Can storage rack	- - Cinala	- - Cinala	- - -	- - -	- - Single	- - Cinala	In-the-door	In-the-door	In-the-door	In-the-door	In-the-door	- • Durlland	• • Dealland
Interior light system Quiet Design NeverClean condenser	Dual-level Premium	Dual-level Premium	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Dual level Premium	Dual level Premium	Dual level Premium	Dual level Premium	Dual level Premium	Dual level Premium	Dual level Premium •
FREEZER FEATURES																		
FrostGuard™ technology Factory-installed icemaker & bin	• • •	•	•	•	• • •	• • •	•	•	•	•	•	•	•	• • • (7.5.11	• • • (7 full aut.)	•	•	•
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s)	3 (full-ext.) 2	3 (full-ext.) 2	2 (full-ext.) 2	2 (full-ext.) 2	1 (full-ext.) 3	1 (full-ext.) 3	1 (full-ext.)	1 (full-ext.) 3	1 (full-ext.) 3	1 (full-ext.) 4	1 (full-ext.) 3	4 (3 full-ext.) 2 3 (2 Adj.)	4 (3 full-ext.) 2 3 (2 Adj.)	4 (3 full-ext.) 2 3 (2 Adj.)	4 (3 full-ext.) 2 3 (2 Adi.)	4 (3 full-ext.) 2 2 Adjustable	4 (3 full-ext.) 2 2 Adjustable	4 (3 full-ext.) 2 2 Adjustable
Door shelves Interior light	4 (2 Adj.)	4 (2 Adj.)	4 (2 Adj.)	4 (2 Adj.)	4	4 (2 Adj.)	4 (2 Adj.)	4 (2 Adj.)	4 (2 Adj.)	4 (2 Adj.)	4 (2 Adj.)	1	1	1	1	1	1	1
EXTERIOR	/	/												00 (11111 00				
Colour(s) available* Counter-depth configuration Door handles	SS / WW, BB Trimless Tubular SS / Colour matched	BB / KB Installed trim	BB / KB Installed trim	SS / WW, BB Trimless	SS / WW, BB Trimless Tubular SS / Colour matched	SS / WW, BB Trimless Tubular SS / Colour matched	AV Trimless	LS - CleanSteel Trimless	BG Trimless	WW, BB Trimless Colour matched	Stainless Steel Full Clad Full-length tubular	SS / WW, BB Trimless	SS / WW Trimless	SS / WW, BB Trimless Sculptured SS/ CM Profile	SV Trimless Aluminium full-length visor	BB Trimless CM Profile Sculpture	WW, BB Trimless CM Profile Sculpture	SV / KB Trimless / Installed Trim
Exterior design Textured steel door and case	Rounded doors	CM / Full-length visor Squared doors	CM full-length visor Squared doors	Tubular SS / Colour matched Rounded doors	Rounded doors Case only / •	Rounded doors Case only / •	Full-length ALU Visor Rounded doors Case only	D-shaped SS Rounded doors Case only	Black GE Rounded doors	Rounded doors	Squared door clad SS clad side and door	Sculptured SS/ CM Textured Rounded doors Case only / •	Sculptured SS/ CM Profile Rounded doors Case only (grey) / •	Rounded doors Case only (grey) / •	Squared doors Case only	Rounded doors Case only	Rounded doors Case only	ALU full-length visor Squared doors Case only (black) / •
Door Steel Case Colour	SS / Textured Black / Colour Matched	Textured Colour matched	Textured Colour matched	SS / Textured Black / Colour Matched	SS / Textured Black / Colour Matched	SS / Textured Black / Colour Matched	Aluminum Look Grey	SS Look Grey	Graphite Look Black	Textured Colour matched	SS SS Wrap	SS/ CM Textured Black / Colour Matched	SS/ High Gloss Grey / Colour Matched	SS/ High Gloss Grey / Colour Matched	SS Grey	High Gloss Smooth Colour Matched	High Gloss Smooth Colour Matched	SS/ Textured Grey/Black
Hinges Overlay Colour	Low profile Black / Colour Matched	Low profile / Hidden Colour Matched / Silver	Hidden Colour Matched / Silver	Low profile Black / Colour Matched	Low profile Black / Colour Matched	Low profile Black / Colour Matched	Low profile Silver	Low profile SS Look	Low profile Black	Low profile None	Hidden Black	Low Profile Black / Colour Matched	Low Profile SS / Colour Matched	Low Profile SS / Colour Matched	Hidden SS	Low Profile Colour Matched	Low Profile Colour Matched	Hidden Monochromatic SS/Silver Matte
Dispenser Recess Colour Dispenser Paddle/Tray Colour Adjustable rollers	Black / Colour Matched Black / Colour Matched All	Colour Matched / Silver Colour Matched / Silver All	Colour Matched / Silver Colour Matched / Silver	Black / Colour Matched Black / Colour Matched	Black / Colour Matched Black / Colour Matched	Black / Colour Matched Black / Colour Matched All	Silver Chrome (Silver) All	SS Look Chrome (Golden) All	Black Black	None None	Black Black All	Black / Colour Matched Black / Colour Matched All	Graphite / Colour Matched Graphite / Colour Matched	Graphite / Colour Matched Graphite / Colour Matched All	Graphite Graphite	Colour Matched Colour Matched All	Colour Matched	Monochromatic SS/Silver Matte Chrome (Golden) / Chrome (Silver)
WEIGHTS & DIMENSIONS		<u>AII</u>	All	All	All	AII		All	All	AII		All	All	rati	iles		Ali	All
Height to top of hinge (mm) A Height to top of case (mm) B	1759 1747	1759 1747	1759 1747	1759 1747	1759 1747	1759 1747	1759 1747	1759 1747	1759 1747	1759 1747	1800 1800	1759 1747	1759 1747	1759 1747	1759 1747	1829 1817	1829 1817	1832 1817
Height to top of door trim (mm) Case depth without door (mm) C Case depth less door handle (mm) D	- 607 680	- 607	1785 607	607	- 607 680	- 607	- 607 680	- 607	- 607	- 607 690	- 610 688	- 607	- 607	- 607 680	607	1832 607 680	1832 607	1832 607
Case depth less door handle (mm) E Case depth with door handle (mm) E Depth w/ FF door open 90° (mm) F	720	720	720	680 720 1158	720	720	720	720	680 720 1158	720	-	720 1158	720 1158	720 1158	720	751	751	689 751 1169
Width (mm) G w/door handle (mm) H	909 1016	909 1016	909 1016	909 1016	909 1016	909 1016	909 1016	909 1016	909 1016	909 1016	920	909 1016	909 1016	909 1016	909 1016	908 970	908 970	908 970
Air clearances Each side (mm) Top (mm) Deal. (mm)	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25	3 25
Back (mm) Product weight (kg)	159	25 159	25 159	25 159	159	25 159	25 159	25 159	25 159	159	25 156	25 159	159	159	25 159	13 177	13 177	13 177
FUNCTIONAL CHARACTERISTICS Power	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
Energy class Energy usage (kW/year)	B 654	B 654	A 546	A 546	A 564	A 564	A 564	A 564	A 564	A 612	A 564	B 651	A 548	A 536	A 536	A 548	A 536	A 536
ISO temperature rise time (hours) Freezing Capacity (kg/24h) Climate Clarc	3,6 12	3,6 12	9,2 12	9,2 12	5,5 9 N (16% - 70%)	9,8 12	9,8 12	9,8 12	9,8 12	9 9	9,8 12	4,3 12	9,7 12	9,7 12 N (1660 - 7090)	9,7 12	6 15	6 15	6 15
Climate Class Sound Power (dBa)	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 50	N (16°C - 32°C) 46	N (16°C - 32°C) 46	N (16°C - 32°C) 46
ACCESSORIES Factory trim kit attached	-	-	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-/•
Black acrylic panels (optional) White acrylic panels (optional)	-	PSPK23DBB PSPK23DWW	PSPK23DBB PSPK23DWW	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Stainless steel panels (optional) Black collar trim (optional) White earlies trim (optional)	-	PSPK23DSS TRMBISBB	PSPK23DSS TRMBISBB		-	-	-	-	:	-	-	-	-	-	-	-	-	
White collar trim (optional) Stainless steel collar trim (optional)	-	TRMBISWW	TRMBISWW -			•	-	-	-		-	-	-	-	TRMBISSS	-	-	
(*) SS= Stainless steel, WW= White, BB= Black, KB= Trimkit with SS tr	rims, handle, AV= Aluminium look, LS	= Laminated "CleanSteel", BG=Graphite	e metallic, SV= Stainless steel door with	h visor handles														

(*) SS= Stainless steel, WW= White, BB= Black, KB= Trimkit with SS trims, handle, AV= Aluminium look, LS= Laminated "CleanSteel", BG=Graphite metallic, SV= Stainless steel door with visor handles

Dimensions

Open door width



Free space dimensions In order to simplify installation, to allow good air circulation, and to make the electrical and water connections, please consult the table below.

	Regular models	Cladded models
Sides	4 mm	8 mm
Тор	25 mm	75 mm
Back	25 mm	25 mm

Mirror and decorative panel dimensions (in mm) 21' installed trim model

Panel A	H: 454	W: 368	Thickness: 6
Panel B	H: 854	W: 368	Thickness: 6
Panel C	H: 1709	W: 495	Thickness: 6

23' installed trim model

Panel A	H: 454
Panel B	H: 854
Panel C	H: 1709

W:	368
W:	368
W:	495

Thickness: 6 Thickness: 6 Thickness: 6


Thickness: 6 Thickness: 6


25' installed trim model

H: 432	W: 368
H: 920	W: 368
H: 1753	W: 495

Weight limitations for custom panels Refrigerator door 17 kg max. Freezer door 13 kg max.

Panel B Panel C





GE / GE Profile Side-by-Side Refrigerator Feature Galleru



Contoured doors and sculptured handles reate a dramatic effect and complement jour desire for a sophisticated look.



CleanSteel feature

Thanks to the magical innovation of the CleanSteel feature, it doesn't fingerprint and is very easy to keep clean.



Color LCD display CD controls are easy-to-see and

easy-to-use for all of your refrigerator functions. Choose among 8 different plors and personalise the display of your vn refrigerator!



LightTouch! Tall dispenser Accommodates tall glassware and dispenses water and ice at the touch of a finaertip.



PreciseFill technology (in 2009) ust select the desired measurement and PreciseFill do the work.



UltraFlow100 NEW in 2009 Quench your thirst by dispensing 100 ounces (ca. 3 litres) of water in 1 minute.




FurboCool setting ools the refrigerator after frequent oor openings.





uicklce setting ikes ice up to 50% faster than normal ngs - ideal for entertaining.



External electronic control ou can control all the functions of the igerator - including the temperature ettings - without opening the doors. aves energy and is so easy to use! New ass-touch and tactile version available.

otects frozen items from freezer burn

rostGuard technology

defrosting only when needed.

ClimateKeeper2 system

hroughout the refrigerator.

'A' Energy

Dual evaporator system creates two

compartment and a separate one for

he freezer-to help maintain freshness

You can have cutting-edge technology

ind advanced options for preserving

oods, while saving on your energy bill.

separate climates-one for the fresh food

Com

1 THE

107 W

1.00

1. I





QuickSpace shelf aller containers are a snap with a quick slide of the retractable shelf.

In-the-door beverage rack

out of the way.

Conveniently stores beverage cans

Beverage Center Right temperature, right now. Now your





GE water filtration (in 2009 Removing impurities adds a fresher taste to your family's water.

CustomCool ExpressThaw

CustomCool SelecTemp






Full-extension CustomCool bin he full-extension CustomCool bin opens vide to make loading and unloading quick and easy.


setting creates the ideal environment maintaining freshness by controlling

perature and airflow.



www.geappliances-europe.com info.geappliances-europe@ge.com





Enjoy cold drinks in less time. The CustomCool ExpressChill setting chills cans, bottles and 2-litres in minutes, not hours, so your favourite beverages will be at just the right temperature.

Be ready to cook when you get home from work. The CustomCool ExpressThaw setting thaws meats and poultry in hours, not days, so you'll spend less time










Raised edges and slide-out shelves keep small spills from becoming big messes.



Integrated Ice system Designed to give you more room to store your favourite fresh foods.



Slide'n Store full-extension freezer baskets Deeper design maximises storage space nd flexibility and ensures easy access to rozen foods.

planning for meals. Keeps meats, fruits and vegetables cool and crisp. The CustomCool SelecTemp



GE has a policy of continuous improvement of its products and reserves the rights to change materials and specifications without notice. The specifications on the rating plate of our product are accurate. All photographs shown in this catalog are noncontractual.

© 2008 General Electric Company

GE Appliances

Refrigeration Side-by-side (case depth of 72 cm)

Technical Specifications Accompanies the Refrigeration 2009 brochure





Side-by-side (72 cm) Technical Specifications		Σ.S.				NEW (in 2009)	NEW (n 2009)	
BRAND MODEL N°	GE GSE20IBTFWW GSE20IBTFBB	GE GSE20JEWFWW GSE20JEWFBB	GE GSE22KEWFSS GSE22KEWFWW GSE22KEWFBB	GE GSE25KETFBB GSE25KETFWW	GE GSE25MGTCSS GSE25MGTCWW	PROFILE PSE25VGXCSS PSE25VGXCWW PSE25VGXCBB	PROFILE PSE27VGXFBB PSE27VGXFWW	
ISO CAPACITY (GROSS / NET)						I SEES VOINEBB		
Total (litres) Fresh food (litres)	596 / 532 371 / 347	587 / 522 371 / 347	643 / 577 427 / 402	732 / 666 444 / 420	755 / 642 466 / 433	755 / 624 466 / 433	821 / 681 518 / 485	
Freezer (litres)	225 / 184	216 / 175	216 / 175	287 / 246	289 / 209	289 / 191	304 / 196	
FRESH FOOD FEATURES Beverage center	-	-		•	-	-	-	
Refreshment center ClimateKeeper system	-	-	•	•	•	•	-	
Dual Evaporator Multiflow air system	-	-	-	-	-	-	-	
Upfront electronic digital temp. display Actual Temperature Display	-	-	•	•	•	•	•	
Temperature Control TurboCool setting	Internal Controls	External temp set display	External temp set display	External temp set display	External temp set display	External - Touch Control	External - Touch Control	
SmortWater filtration system LightTouch! dispenser	-	- Crushed Ice, Cubes, Water	- Crushed Ice, Cubes, Water	- Crushed Ice, Cubes, Water	- Crushed Ice, Cubes, Water	Plus Crushed Ice, Cubes, Water	Plus Crushed Ice, Cubes, Water	Cru
Integrated (Trimless) Dispenser Precise Fill	-	- -	-	-	-	Clusified ice, Cubes, Water	erasnea ree, cabes, water	CIU
UltraFlow100 Dispenser Light	-	-	-	-	-	LED	LED	
Child lock	-	-		-	•	•	•	
Door alarm Quick Ice feature	-	-	-	-	-	•	•	
Water filter indicator light Cabinet shelves	- 3 Glass	- 3 Glass	- 3 Glass	- 3 Glass	3 Glass	3 Glass	3 Glass	
Adjustable Slide-out, spillproof	-	3	2 (spillproof only)	3 2 (spillproof only)	3	3	2	
QuickSpace shelf Integrated shelf support system	-	-	-	-	•	•	÷	
Snugger clip(s) Bottle Retainer(s)	2	2 2	2 2	2 2	2 1 (plastic)	2	2 2	
3-Stack drawer system Deli drawer	- 1 Sealed	- 1 Sealed	-	-	1 Adj. Temp.	• Adj. Temp.	• Adj. Temp.	
Vegetable/fruit crisper Sealed drawer	1 Sealed	1 Sealed	1 Adj. Humidity 1 Sealed	1 Adj. Humidity 1 Sealed	1 Adj. Hum 1 Sealed	Adj. Humidity, CustomCool w/full-extension	Adj. Humidity, CustomCool w/full-extension	Adj.
ClearLook door bins Dairy compartment (removable)	2 + 2 fixed	2 + 2 fixed	2 + 2 fixed	2 + 2 fixed	3 + 1 fixed	4 (3 Adj.)	4 (3 Adj.)	
Beverage rack Wine Caddy	-	•	•	•	•	In-the-door	In-the-door	
Interior light system Quiet Design	Single Level Deluxe	Single Level Deluxe	Single Level Deluxe	Single Level Deluxe	Dual Level Premium	Dual level Premium	Dual level Premium	
NeverClean condenser	•	•	•	•	•	•	•	
FREEZER FEATURES		•		•		•		
FrostGuard technology Factory-installed icemaker & bin Wire slide-out baskets	- - 1 - 10	1 slide-out	1 slide-out	1 slide-out	3 slide-out	• 4 (3 full-ext.)	4 (3 full-ext.)	
Wire cabinet shelves	1 slide-out 3	3	4	4	2	2	2	
Wire tilt-out door bin(s) Door shelves	- 6	- 5	- 5	- 5	- 4 (2 adj.)	3 (2 Adj.)	3 (2 Adj.) 1	
Interior light	•	•	•	•	•	Dual	•	
EXTERIOR Colour(s) available	WW, BB	WW, BB	SS / WW, BB	WW, BB	SS / WW	SS / WW, BB	WW, BB	
Door handles Exterior design	Colour matched -	Colour matched Flat	Colour matched Flat	Colour matched Flat	Tubular SS/Colour matched Contoured	Sculptured SS / Colour Matched Contoured	Colour Matched Flat	
Textured steel door and case Door Steel	• Textured	Textured	Case only (black) / • SS / Textured	Textured	Case only (black) / • SS / Textured	Case only / • SS/ High Gloss	• High Gloss	
Case Colour Hinges	Colour Matched Normal	Colour Matched Normal	Black / Colour Matched Normal	Colour Matched Normal	Black / Colour Matched Low Profile	Grey / Colour Matched Hidden	Colour Matched Low Profile	
Overlay Colour Dispenser Recess Colour	Colour Matched Colour Matched	Colour Matched Colour Matched	Black / Colour Matched Black / Colour Matched	Colour Matched Colour Matched	Black / Colour Matched Black / Colour Matched	SS / Colour Matched Graphite / Colour Matched	Colour Matched Colour Matched	
Dispenser Paddle/Tray Colour Adjustable rollers	Colour Matched Front	Colour Matched Front	Black / Colour Matched Front	Colour Matched Front	Black / Colour Matched	Graphite / Colour Matched Front	Colour Matched Front	
WEIGHTS & DIMENSIONS	Tione		Tronc	Tione	7.00	Hone		
Height to top of hinge (mm) A Height to top of case (mm) B	1715 1690	1715 1690	1715 1690	1772 1747	1759 1747	1759 1747	1759 1747	
Height to top of door trim (mm)	- 712	- 712	- 712	712	712	712	712	
Case depth without door (mm) C Case depth less door handle (mm) D Case depth with door handle (mm) C	794	794	794	794	820 886	- 820	820	
Case depth with door handle (mm) E Depth w/ FF door open 90° (mm) F Uidth (mm) F	853 1204	853 1204	853 1204	853 1254	1272	886 1272	886 1272	
Width (mm) G w/door handle (mm) H	801 862	801 862	851 862	909 974	909 1077	909 1077	909 1077	
Air clearances Each side (mm) Top (mm)	3 25	3 25	3 25	3 25	3 25	3 25	3 25	
Back (mm) Product weight (kg)	25 129	25 129	25 136	25 144	25 179	25 179	25 179	
FUNCTIONAL CHARACTERISTICS								
Power Energy class	220-240V / 50Hz A	220-240V / 50Hz B	220-240V / 50Hz A	220-240V / 50Hz B	220-240V / 50 Hz A	220-240V / 50 Hz A	220-240V / 50 Hz A	
Energy usage (kW/year) ISO temperature rise time (hours)	500 7,3	671 5,1	566 5,7	772 7,0	558 5,3	598 5,3	626 10	
Freezing Capacity (kg/24h) Climate Class	12 N (16°C - 32°C)	12 N (16°C - 32°C)	13 N (16°C - 32°C)	15 N (16°C - 32°C)	12 N (16°C - 32°C)	12 N (16°C - 32°C)	16 N/T (16°C - 32°C)	
Sound Power (dBa)	49	49	47	48	50	50	52	

(*) SS= Stainless steel, WW= White, BB= Black



PSE29NHWCSS

PSE27NHWCSS


PSE27VHXTWW PSE27VHXTBB

TROTIEE	
PSE29VHXTBB PSE29VHXTWW	

785 / 645	785 / 645	840/691	840 / 691
482 / 449	482 / 449	518/485	518/485
304 / 196	304 / 196	322 / 206	322 / 206
5047150	5047150	5227 200	5227200
-	-	-	-
•	•	•	•
•	•	•	•
-	-	-	-
•	•	•	•
•		•	
•	•	•	•
Internal Controls	External - Touch Control	Internal Controls	External - Touch Control
•	•	•	•
Plus	Plus	Plus	Plus
Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	
CLUSHED ICE, CUDES, WOLEI	•	CLUSHED ICE, CUDES, WOLEI	Crushed Ice, Cubes, Water
-	•	-	•
-	•	-	•
-	•	-	•
•	LED	•	LED
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
3 Glass	3 Glass	3 Glass	3 Glass
3	3	3	3
2	2	2	2
•	•	•	•
•	•	•	•
2	2	2	2
2	2	1	1
•	•	•	•
Adj. Temp.	Adj. Temp.	Adj. Temp.	Adj. Temp.
Adj. Terrip. Adj. Humidity, CustomCool	Adj. Humidity, CustomCool	Adj. Humidity, CustomCool	Adj. Humidity, CustomCool
w/full-extension	w/full-extension	w/full-extension	w/full-extension
3 (1 Adj.)	3 (1 Adj.)	3 (1 Adj.)	3 (1 Adj.)
• Can storago rack	• Cap storage rack	• Can storage rack	•
Can storage rack	Can storage rack	Can storage rack	Can storage rack
-	-	•	•
Dual level	Dual level	Dual level	Dual level
Premium	Premium	Premium	Premium
•	•	•	•
•	•	•	•
•	•	•	•
4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)
2	2	2	2
3 (2 Adj.)	3 (2 Adj.)	3 (2 Adj.)	3 (2 Adj.)
1	1	1	1
•	•	•	•
SS	WW, BB	SS	WW, BB
SS	Colour Matched	SS	Colour Matched
Contoured	Contoured	Contoured	Contoured
Case Only	•	Case Only	•
SS	Textured	SS	Textured
Black	Colour Matched	Black	Colour Matched
Low Profile	Low Profile	Low Profile	Low Profile
Black	Colour Matched	Black	Colour Matched
Black	Colour Matched	Black	Colour Matched
Black	Colour Matched	Black	Colour Matched
Front	Front	Front	Front
TIONE	nont	non	FIUIL
1759	1759	1759	1759
1759	1759	1759	1759
712	712	712	
	/ 12		712
-		-	-
830	- 020	057	057
820	820	853	853
886	820 886	915	915
886 1272	820 886 1272	915 1262	915 1262
886 1272 909	820 886 1272 909	915 1262 909	915 1262 909
886 1272 909 1077	820 886 1272 909 1077	915 1262 909 1156	915 1262 909 1156
886 1272 909 1077 3	820 886 1272 909 1077 3	915 1262 909 1156 3	915 1262 909 1156 3
886 1272 909 1077 3 25	820 886 1272 909 1077 3 25	915 1262 909 1156 3 25	915 1262 909 1156 3 25
886 1272 909 1077 3 25 25	820 886 1272 909 1077 3 25 25	915 1262 909 1156 3	915 1262 909 1156 3 25 25
886 1272 909 1077 3 25	820 886 1272 909 1077 3 25	915 1262 909 1156 3 25	915 1262 909 1156 3 25
886 1272 909 1077 3 25 25	820 886 1272 909 1077 3 25 25	915 1262 909 1156 3 25 25	915 1262 909 1156 3 25 25
886 1272 909 1077 3 25 25	820 886 1272 909 1077 3 25 25 179	915 1262 909 1156 3 25 25 177	915 1262 909 1156 3 25 25 177
886 1272 909 1077 3 25 25 179	820 886 1272 909 1077 3 25 25	915 1262 909 1156 3 25 25	915 1262 909 1156 3 25 25
886 1272 909 1077 3 25 25 179 220-240V / 50 Hz	820 886 1272 909 1077 3 25 25 179 220-240V / 50 Hz	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz
886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A	820 886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A	915 1262 909 1156 3 25 25 25 177 220-240V / 50 Hz A	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A
886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A 642	820 886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A 642	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636
886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A 642 10	820 886 1272 909 1077 3 25 25 25 179 220-240V / 50 Hz A 642 10	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636 8,3	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636 8,3
886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A 642 10 16	820 886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A 642 10 16	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636 8,3 16	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636 8,3 16
886 1272 909 1077 3 25 25 179 220-240V / 50 Hz A 642 10	820 886 1272 909 1077 3 25 25 25 179 220-240V / 50 Hz A 642 10	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636 8,3	915 1262 909 1156 3 25 25 177 220-240V / 50 Hz A 636 8,3

Dimensions

Open door width





Free space dimensions

۵ (

In order to simplify installation, to allow good air circulation, and to make the electrical and water connections, please consult the table below.

	Regular models
Sides	4 mm
Тор	25 mm
Back	25 mm



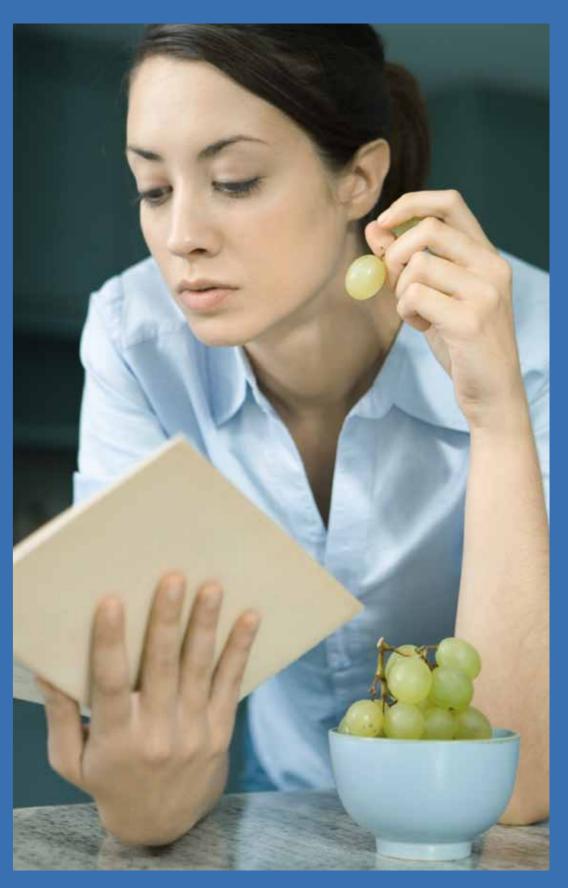

GE Profile Bottom-Freezer Feature Gallery



Adjustable temperature deli drawer ovides a temperature-controlled, easy ccess environment for fresh foods.



lide-out, spill-proof





Electronic touch controls with digital temperature readout Enables better temperature management and more accurate temperature settings.



ShelfSaver beverage rack Provides convenient storage and easy access for canned drinks, gg cartons, wine bottles, even casserole



15-

Adjustable ClearLook aallon door bins Hold large containers with style and ease.



Adjustable humidity crispers Provide the ideal storage environment, bing fruits and vegetables crisp and



Multi-level Slide n' Store freezer drawers

TER In the freezer compartment there are 3 Ill extension drawers for easy access to ll frozen food items. Stainless steel trim.









'A' Energy



You can have cutting-edge technology and advanced options for preserving oods, while saving on your energy bill.



Our slim water filter will remove chlorine, lead, cysts, mercury, and many other contaminants. By reducing contaminants and odors, we have cleaner and better tasting water and ice.

ClimateKeeper system

This technology combines digital controls, electronic sensors and a multi-flow air system to maintain a constant fresh food climate.





GE imagination at work

* Note that not all features are available on all models. Please see the product specifications for details.

GE Appliances Europe-Middle East-Africa Kouterveldstraat, 2 Belgium

www.geappliances-europe.com info.geappliances-europe@ge.com

GE has a policy of continuous improvement of its products and reserves the rights to change materials and specifications without notice. The specifications on the rating plate of our product are accurate. All photographs shown in this catalog are noncontractual.

© 2008 General Electric Company

GE Appliances

Refrigeration Bottom-Freezer (case depth of 61 and 72 cm)

Technical Specifications Accompanies the Refrigeration 2009 brochure





Bottom-Freezer (61 cm) Technical Specifications

BRAND

PROFILE		
PDCE1NBWDSS		

PROFILE

PROFILE






	Bottom-Freezer (72 cm) Technical Specifications			E	la
PROFILE	BRAND	PROFILE	PROFILE	PROFILE	PROFILE
1NFWABV	MODEL N°	PDSE5NBWDBB	PDSE5NBWDSS	PFSE5NJWDWW	PFSE5NJWDSS
EINFWAKB	EXTERIOR STYLE	PDSE5NBWDWW Bottom Freezer - Single Door	PDSE5NBWJSS Bottom Freezer - Single Door	PFSE5NJWDBB Bottom Freezer- French door	Bottom Freezer- French doo
635	ISO CAPACITY Total Gross Volume (litres)	760	760	752	752
424	Fresh Food Gross Volume (litres)	507	507	499	499
212	Freezer Gross Volume (litres)	253	253	253	253
491 388	Total Storage Volume (litres) Fresh Food Storage Volume (litres)	607 465	607 465	589 456	589 456
103	Freezer Storage Volume (litres)	141	141	133	133
	FRESH FOOD FEATURES				
•	Climate Keeper System	•	•	•	•
•	Multiflow Air System	•	•	•	•
:	Upfront Electronic Digital Display	•	:	•	•
• 4	Upfront Electronic Touch Temp Controls Electronic Sensors	• 4	• 4	4	•
Door	Galvanized Door & Case	Door	Stainless Door	Door	Stainless Door
•	Easily Removable Door Gasket	•	•	•	•
• ostGuard	NeverClean Condenser Defrost Type	• FrostGuard	FrostGuard	FrostGuard	• FrostGuard
Jacouulu	Shelves	TUSIGUUTU	TOStGuuru	FIOSIGUUIU	FIOS(GUDIO
ontilever	Shelf Support System Total Number of Shelves	Cantilever	Cantilever	Cantilever	Cantilever
4 Glass	Total Number of Shelves	4 Glass	4 Glass	4 Glass	4 Glass
4 Split 3	Adjustable Shelves Slide-Out Shelves	4 Split 3	4 Split 3	4 Split 3	4 Split 3
3	Spill Proof Shelves	3	3	3	3
1	Quick Space Shelf	1	1	1	1
-	Crispers/Pans		7	7	7
3 dity (Clear Profile)	Total number of Pans/Crispers Top Pan/Crisper(s)	3 2-Adj. Humidity (Clear Profile)	3 2-Adj. Humidity (Clear Profile)	3 2-Adj. Humidity (Clear Profile)	3 2-Adj. Humidity (Clear Profile)
Proof Glass	Top Pan/Crisper(s) Cover	Spill Proof Glass	Spill Proof Glass	Spill Proof Glass	Spill Proof Glass
Control Meat Pan	Bottom Pan/Crisper(s)	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan
lip Top	Bottom Pan/Crisper(s) Cover	Flip Top	Flip Top	Flip Top	Flip Top
oroof Glass wer glides	Vegetable/Fruit Crisper Cover Support System	Spillproof Glass Drawer glides	Spillproof Glass Drawer glides	Spillproof Glass Drawer glides	Spillproof Glass Drawer glides
wer glides	Controls	Branci giloco	Brower glides	brower glides	brower glides
lectronic	Туре	Electronic	Electronic	Electronic	Electronic
Upfront Temp Readout	Location Features	Upfront Digital Temp Readout	Upfront Digital Temp Readout	On the External Dispenser Digital Temp Readout	On the External Dispenser Digital Temp Readout
4	Sensors	4	4	4	4
	Fresh Food Features				
OW (RoHS)	Lighting	2-60W (RoHS)	2-60W (RoHS)	2-60W (RoHS)	2-60W (RoHS)
•	Protective Lamp Covers TurboCool	•	•	•	•
front Control	Energy Saver	On Upfront Control	On Upfront Control	On External Dispenser	On External Dispenser
•	Door Alarm	•	•	•	•
	FREEZER FEATURES				
•	Quick Freeze Shelf (Sweet Spot Shelf)	•	•	•	•
OW RoHS	Lighting	1-60W RoHS	1-60W RoHS	1-60W RoHS	1-60W RoHS
3 Wire	Baskets	3 Wire	3 Wire	3 Wire	3 Wire
- Smart Water Slim	Dispenser GE Smartwater	-	-	External, Water Only 1 Year GE Smart Water Slim	External, Water Only 1 Year GE Smart Water Slim
ry Installed	Ice System	Optional IMG5 Ready	Optional IMG5 Ready	Factory Installed	Factory Installed
		-		-	~
	EXTERIOR Appearance				
BV, KB	Colors Offered	WW, BB	SS	WW, BB	SS
extured	Cabinet	Textured	Textured	Textured	Textured
tured Trimkit	Door Bottom Grill	Smooth, Bowed w/ Chamfer	Bowed w/ Chamfer	Smooth, Bowed w/ Chamfer	Bowed w/ Chamfer
t & Right	Bottom Grill Door Hinge	• Left or Right	DSS - Right, JSS - Left	∙ Left & Right	Left & Right
•	Door Stops	•	•	•	•
nt Front Adj.	Leveling System	2 point front adjustable	2 point front adjustable	2 point front adjustable	2 point front adjustable
1atched Visor	Handles Type	Smooth Profile Color Matched	Profile Stainless Hydroformed	Smooth Profile Color Matched	Profile Stainless Hydroformed
r Matched	Color	Color Matched	Stainless	Color Matched	Stainless
-	Reversible				-
•	Factory Installed Handles	•	•	•	•
	WEIGHTS & DIMENSIONS				
1753	Height to Top of Case (mm)	1753	1753	1753	1753
1768 613	Overall Height (mm) A Case Depth Without Door (mm) G	1768 724	1768 724	1768 724	1768 724
711	Depth Without Door Handle (mm)	825	825	825	825
1095	Depth With Door Open 90 Degerees (mm)D	1670	1670	1206	1206
1194	Depth With Drawer Fully Extended (mm)	1296	1297	1297	1297
787 911	Overall Depth (mm) C Overall Width (mm) B	891 911	891 911	891 911	891 911
911 984	Width w/Door Open 90 Less Handle (mm)	911 946	911 946	911 984	911 984
1079	Width w/Door Open 90 Inc. Handle (mm)	1038	1038	1079	1079
3	Air Clearances Each Side (mm)	3	3	3	3
25	Top (mm) Back (mm)	25 25	25 25	25 25	25 25
13	Duck (mm)	23	23	23	25
13					
13	FUNCTIONAL CHARACTERISTICS				
13 440V/50Hz B	FUNCTIONAL CHARACTERISTICS Power Energy class	220-240V/50Hz A	220-240V/50Hz A	220-240V/50Hz A	220-240V/50Hz A

RAND	PROFILE	PROFILE	PROFILE	PROFILE	PROFILE
ODEL N°	PDCE1NBWDWW PDCE1NBWDBB	PDCE1NBWDSS PDCE1NBWJSS	PFCE1NJWDWW PFCE1NJWDBB	PFCE1NJWDSS	PFIE1NFWABV PFIE1NFWAKB
XTERIOR STYLE	Bottom Freezer - Single Door	Bottom Freezer - Single Door	Bottom Freezer- French door	Bottom Freezer- French door	Bottom Freezer- French door
O CAPACITY					
Total Gross Volume (litres)	640	640	635	635	635
Fresh Food Gross Volume (litres)	428	428	424	424	424
Freezer Gross Volume (litres)	212	212	212	212	212
Total Storage Volume (litres)	505	505	491	491	491
Fresh Food Storage Volume (litres)	394	394	388	388	388
Freezer Storage Volume (litres)	111	111	103	103	103
ESH FOOD FEATURES					
Climate Keeper System	•	•	•	•	•
Multiflow Air System	•	•	•	•	•
Upfront Electronic Digital Display	•	•	•	•	•
Upfront Electronic Touch Temp Controls	•	•	•	•	•
Electronic Sensors	4	4	4	4	4
Galvanized Door & Case	Door	Stainless Door	Door	Stainless Door	Door
Easily Removable Door Gasket	•	•	•	•	•
NeverClean Condenser	•	•	•	•	•
Defrost Type	FrostGuard	FrostGuard	FrostGuard	FrostGuard	FrostGuard
Shelves					
Shelf Support System	Cantilever	Cantilever	Cantilever	Cantilever	Cantilever
Total Number of Shelves	4 Glass	4 Glass	4 Glass	4 Glass	4 Glass
Adjustable Shelves	4 Split	4 Split	4 Split	4 Split	4 Split
Slide-Out Shelves	3	3	3	3	3
Spill Proof Shelves	3	3	3	3	3
Quick Space Shelf	1	1	1	1	1
Crispers/Pans					
Total number of Pans/Crispers	3	3	3	3	3
Top Pan/Crisper(s)	2-Adj. Humidity (Clear Profile)	2-Adj. Humidity (Clear Profile)	2-Adj. Humidity (Clear Profile)	2-Adj. Humidity (Clear Profile)	2-Adj. Humidity (Clear Profile)
Top Pan/Crisper(s) Cover	Spill Proof Glass	Spill Proof Glass	Spill Proof Glass	Spill Proof Glass	Spill Proof Glass
Bottom Pan/Crisper(s)	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan	F/W Temp Control Meat Pan
Bottom Pan/Crisper(s) Cover	Flip Top	Flip Top	Flip Top	Flip Top	Flip Top
Vegetable/Fruit Crisper Cover	Spillproof Glass	Spillproof Glass	Spillproof Glass	Spillproof Glass	Spillproof Glass
Support System	Drawer glides	Drawer glides	Drawer glides	Drawer glides	Drawer glides
Controls		Sidilei gildes	Bratter glideb	Branci gildes	Bratter glides
Туре	Electronic	Electronic	Electronic	Electronic	Electronic
Location	Upfront	Upfront	On the External Dispenser	On the External Dispenser	Upfront
Features	Digital Temp Readout	Digital Temp Readout	Digital Temp Readout	Digital Temp Readout	Digital Temp Readout
Sensors	4		4	//	//
Fresh Food Features				4	7
Lighting	2-60W (RoHS)	2-60W (RoHS)	2-60W (RoHS)	2-60W (RoHS)	2-60W (RoHS)
Protective Lamp Covers	•	•	•	•	•
TurboCool	•	•	•	•	•
Energy Saver	On Upfront Control	On Upfront Control	On External Dispenser	On External Dispenser	On Upfront Control
Door Alarm	•	•	•	•	•
EEZER FEATURES					
Quick Freeze Shelf (Sweet Spot Shelf)	•	•	•	•	•
Lighting	1-60W RoHS	1-60W RoHS	1-60W RoHS	1-60W RoHS	1-60W RoHS
Baskets	3 Wire	3 Wire	3 Wire	3 Wire	3 Wire
Dispenser	-	-	External, Water Only	External, Water Only	-
GE Smartwater	-	-	1 Year GE Smart Water Slim	1 Year GE Smart Water Slim	1 Year GE Smart Water Slim
Ice System	Optional IMG5 Ready	Optional IMG5 Ready	Factory Installed	Factory Installed	Factory Installed
TERIOR					
Appearance					
Colors Offered	WW, BB	SS	WW,BB	SS	BV, KB
Cabinet	Textured	Textured	Textured	Textured	Textured
Door	Smooth, Bowed w/ Chamfer	Bowed w/ Chamfer	Smooth, Bowed w/ Chamfer	Bowed w/ Chamfer	Flat Textured Trimkit
Bottom Grill	•	•	•	•	•
Door Hinge					Loft C Dight
Door Stops	Left or Right	DSS - Right, JSS - Left	Left & Right	Left & Right	Left & Right
Leveling System	•	•	•	•	•
	4 Point Front Adj.	DSS - Right, JSS - Left • 4 Point Front Adj.	Left & Right • 4 Point Front Adj.	Left & Right 4 Point Front Adj.	4 Point Front Adj.
Handles	• 4 Point Front Adj.	4 Point Front Adj.	4 Point Front Adj.	4 Point Front Adj.	4 Point Front Adj.
Туре	4 Point Front Adj. Smooth Profile Color Matched	4 Point Front Adj. Profile Stainless Hydroformed	4 Point Front Adj. Smooth Profile Color Matched	•	4 Point Front Adj. Color Matched Visor
Type Color	• 4 Point Front Adj.	4 Point Front Adj.	4 Point Front Adj.	4 Point Front Adj.	4 Point Front Adj.
Type Color Reversible	4 Point Front Adj. Smooth Profile Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless	4 Point Front Adj. Smooth Profile Color Matched	4 Point Front Adj.	4 Point Front Adj. Color Matched Visor
Type Color	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless	4 Point Front Adj. Color Matched Visor Color Matched
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless	4 Point Front Adj. Color Matched Visor Color Matched
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753	4 Point Front Adj. Color Matched Visor Color Matched
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • 1753 A 1758	4 Point Front Adj. Profile Stainless Hydroformed Stainless • • 1753 1768	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 1768	4 Point Front Adj. Profile Stainless Hydroformed Stainless • • 1753 1768	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • A 1753 G 613	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613	4 Point Front Adj. Smooth Profile Color Matched Color Matched • 1753 1768 613	4 Point Front Adj. Profile Stainless Hydroformed Stainless • • 1753 1768 613	4 Point Front Adj. Color Matched Visor Color Matched
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth Without Door Handle (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • • • • • • • • • • • •	4 Point Front Adj. Profile Stainless Hydroformed Stainless • • 1753 1768 613 711	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 1768 613 711	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth Without Door Handle (mm) Depth With Door Open 90 Degerees (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • • • • • • • • • • • • • • • • •	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559	4 Point Front Adj. Smooth Profile Color Matched Color Matched • 1753 1768 613	4 Point Front Adj. Profile Stainless Hydroformed Stainless • • 1753 1768 613	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768 613
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth Without Door Handle (mm) Depth With Door Open 90 Degerees (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • • • • • • • • • • •	4 Point Front Adj. Profile Stainless Hydroformed Stainless • • 1753 1768 613 711	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 1768 613 711	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711	4 Point Front Adj. Color Matched Visor Color Matched 1753 1768 613 711
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth Without Door Handle (mm) Depth With Door Open 90 Degerees (mm) Depth With Drawer Fully Extended (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • • • • • • • • • • • • • • • • •	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 1768 613 711 1095	4 Point Front Adj. Profile Stainless 1753 1768 613 711 1095 1194	4 Point Front Adj. Color Matched Visor Color Matched 1753 1768 613 711 1095 1194
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth Without Door Mandle (mm) Depth With Door Open 90 Degerees (mm) Depth With Drawer Fully Extended (mm) Overall Depth (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711 1559 1194	4 Point Front Adj. Smooth Profile Color Matched Color Matched	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1095 1194 787	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768 613 711 1095 1194 787
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door Handle (mm) Depth Witho Door Open 90 Degerees (mm) Depth With Door Open 90 Degerees (mm) Depth With Drower Fully Extended (mm) Overall Depth (mm) Overall Depth (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559 1194 787 911	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 1768 613 711 1095 1194 787 911	4 Point Front Adj. Profile Stainless Hydroformed Stainless - - - - - - - - - - - - -	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768 613 711 1095 1194 787 911
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Depth Without Door (mm) Depth With Door Open 90 Degrees (mm) Depth With Dorover Fully Extended (mm) Overall Bepth (mm) Overall Width (mm) Width w/Door Open 90 Less Handle (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911 946	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559 1194 787 911 946	4 Point Front Adj. Smooth Profile Color Matched Color Matched 	4 Point Front Adj. Profile Stainless Hydroformed Stainless - - 1753 1768 613 711 1095 1194 787 911 984	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768 613 711 1095 1194 787 911 984
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth With Door Open 90 Degerees (mm) Depth With Doro Open 90 Degerees (mm) Overall Depth (mm) Overall Depth (mm) Overall Width (mm) Width w/Door Open 90 Less Handle (mm) Width w/Door Open 90 Inc. Handle (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • • • • • • • • • • •	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559 1194 787 911 946 1038	4 Point Front Adj. Smooth Profile Color Matched Color Matched • 1753 1768 613 711 1095 1194 1795 1194 787 911 984 1079	4 Point Front Adj. Profile Stainless Hydroformed Stainless - - - - - - - - - - - - -	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768 613 711 1095 1194 787 911 984 1079
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door Handle (mm) Depth Without Door Handle (mm) Depth With Door Open 90 Degerees (mm) Depth With Door Open 90 Degerees (mm) Overall With (mm) Overall Depth (mm) Overall Depth (mm) Width w/Door Open 90 Icess Handle (mm) Width w/Door Open 90 Inc. Handle (mm) Air Clearances Each Side (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911 946 1038 3	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711 1559 1194 787 911 946 1038 3	4 Point Front Adj. Smooth Profile Color Matched Color Matched 1753 1768 613 711 1095 1194 787 911 984 1079 3	4 Point Front Adj. Profile Stainless Hydroformed Stainless - - - - - - - - - - - - -	4 Point Front Adj. Color Matched Visor Color Matched 1753 1768 613 711 1095 1194 787 911 984 1079 3
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth With Door Open 90 Degerees (mm) Depth With Door Open 90 Degerees (mm) Overall Depth (mm) Overall Width (mm) Width w/Door Open 90 Less Handle (mm) Midth w/Door Open 90 Less Handle (mm) Air Clearances Each Side (mm) Top (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911 946 1038 3 25	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559 1194 787 911 946 1038 3 25	4 Point Front Adj. Smooth Profile Color Matched Color Matched 	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711 1095 1194 787 911 984 1079 3 25	4 Point Front Adj. Color Matched Visor Color Matched 1753 1768 613 711 1095 1194 787 911 984 1079 3 25
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Depth Without Door (mm) Depth With Door Open 90 Degrees (mm) Depth With Door Open 90 Degrees (mm) Depth With Door Open 90 Dess Handle (mm) Overall Depth (mm) Overall Width (mm) Width w/Door Open 90 Less Handle (mm) Width w/Door Open 90 Less Handle (mm) Air Clearances Each Side (mm) Top (mm) Back (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911 946 1038 3	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711 1559 1194 787 911 946 1038 3	4 Point Front Adj. Smooth Profile Color Matched Color Matched 1753 1768 613 711 1095 1194 787 911 984 1079 3	4 Point Front Adj. Profile Stainless Hydroformed Stainless - - - - - - - - - - - - -	4 Point Front Adj. Color Matched Visor Color Matched 1753 1768 613 711 1095 1194 787 911 984 1079 3
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Case Depth Without Door (mm) Depth Without Door Andle (mm) Depth With Door Open 90 Degerees (mm) Depth With Drawer Fully Extended (mm) Overall Depth (mm) Overall Width (mm) Width w/Door Open 90 Less Handle (mm) Width w/Door Open 90 Inc. Handle (mm) Width w/Door Open 90 Inc. Handle (mm) Mith w/Door Open 90 Inc. Handle (mm) Air Clearances Each Side (mm) Top (mm) Back (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911 946 1038 3 25 13	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559 1194 787 911 946 1038 3 25 13	4 Point Front Adj. Smooth Profile Color Matched Color Matched • 1753 1768 613 711 1095 1194 1079 1079 3 25 13	4 Point Front Adj. Profile Stainless Hydroformed Stainless - - - - - - - - - - - - -	4 Point Front Adj. Color Matched Visor Color Matched • 1753 1768 613 711 1095 1194 787 911 984 1079 3 25 13
Type Color Reversible Factory Installed Handles EIGHTS & DIMENSIONS Height to Top of Case (mm) Overall Height (mm) Depth Without Door (mm) Depth Without Door Andle (mm) Depth With Doro Open 90 Degerees (mm) Depth With Door Open 90 Degerees (mm) Overall Byth (mm) Overall Width (mm) Width w/Door Open 90 Less Handle (mm) Width w/Door Open 90 Less Handle (mm) Width w/Door Open 90 Less Handle (mm) Midth w/Door Open 90 Less Handle (mm) Air Clearances Each Side (mm) Top (mm)	4 Point Front Adj. Smooth Profile Color Matched Color Matched • • 1753 A 1768 G 613 H 711 D 1559 1194 C 787 B 911 946 1038 3 25	4 Point Front Adj. Profile Stainless Hydroformed Stainless • 1753 1768 613 711 1559 1194 787 911 946 1038 3 25	4 Point Front Adj. Smooth Profile Color Matched Color Matched 	4 Point Front Adj. Profile Stainless Hydroformed Stainless 1753 1768 613 711 1095 1194 787 911 984 1079 3 25	4 Point Front Adj. Color Matched Visor Color Matched 1753 1768 613 711 1095 1194 787 911 984 1079 3 25


(*) SS= Stainless steel, WW= White, BB= Black, BV= Black with visor handle, KB= Stainless steel look trimkit

Dimensions

French door



Single door







Top-Freezer Feature Gallery



Adjustable temperature

deli drawer Provides a convenient, temperaturecontrolled place for meats, cheeses and other favourite foods.



Slide-out, spill-proof glass shelves Simplify loading, unloading and cleaning.



Electronic touch controls with digital temperature readout Precise and easy to use. Take the guesswork out of selecting accurate temperatures.



ShelfSaver beverage rack Provides convenient storage for a 12-pack, two egg cartons or a 23 cm x 33 cm casserole dish.



Adjustable ClearLook gallon door bins Hold large containers with style and ease.



Adjustable humidity crispers Provide the ideal storage environment for fruits and vegetables.



rostGuard technology efrosts only when needed, educing freezer burn.



Filt-out locking freezer door bin For convenient loading and unloading, and easy access to items.



* Note that not all features are available on all models. Please see the product specifications for details.



GE Appliances Europe-Middle East-Africa Kouterveldstraat, 2 B-1831 Diegem Belgium

www.geappliances-europe.com info.geappliances-europe@ge.com



GE has a policy of continuous improvement of its products and reserves the rights to change materials and specifications without notice. The specifications on the rating plate of our product are accurate. All photographs shown in this catalog are noncontractual.

© 2008 General Electric Company

GE Appliances

Refrigeration

Top-Freezer Technical Specifications Accompanies the Refrigeration 2009 brochure






Top-Freezer			1					
echnical Specificatio	ns							
cernical specificatio	113	8.0 C						
		100 million (100 million)		Sec. 2		100 million (100 million)		5
RAND	GE	GE	GE	GE	GE	GE	PROFILE	PROFILE
ODEL N°	GTE16BBSWW	GTE16HBWWW	GTE17HBWWW	GTE22IBT	GTE22JBT	GTE25DBT	PTE22SBTSS PTE22LBTWW	PTE25SBTSS PTE25LBTWW
O CAPACITY (GROSS / NET)								
otal (litres)	458 / 403	458/411	486 / 440	615 / 575	615 / 575	697 / 653	615 / 575	697 / 653
resh food (litres)	324 / 300	324 / 298	352 / 327	435 / 430	435 / 430	496 / 490	435 / 430	496 / 490
eezer (litres)	134 / 103	134 / 113	134 / 113	180/145	180 / 145	201 / 163	180 / 145	201/163
RESH FOOD FEATURES								
imateKeeper system	-	-	-	-	-	-	•	•
ultiflow air system	- E-M inset knob	- E-M inset knob	- E-M inset knob	• Illuminated dial	• Illuminated dial	•	•	•
ofront electronic digital temp. display ectronic sensors	E-M INSEL KIOD	E-MINSEL KIOD	E-M INSEL KNOD	iliuminated alai	iliuminatea alai			
abinet shelves	3 Wire	3 Glass	3 Glass	3 Wire	4 Glass	3 Wire	4 Glass	4 Glass
ljustable	3 F/W	2 F/W	2 F/W	3 (2 split; 1 full-width)	4 Gluss 4 Split	3 (2 split; 1 full-width)	4 Gluss 4 Split	4 Split
de-out, removable	3	3 (removable only)	3 (removable only)	3 (removable only)	4 (removable only)	3 (removable only)	3	3
helfSaver rack	-	-	-	-	-	-	•	•
billproof	-	-	-	•	4	-	4	4
nugger clip(s)	-	-	-	-	2	-	2	2
ottle Retainer(s)	-	-	-	-	1	1	2	2
eli/Snack pan	-	•	•	•	•	•	Adj. Temp.	Adj. Temp.
egetable/fruit crisper	2	2	2	2	2	2	2 Adj. Humidity	2 Adj. Humidity
djustable Door bins	2	2	2	-	4	-	4 (ClearLook)	4 (ClearLook)
xed door bins	2 (tall bottle)	2 (tall bottle)	2 (tall bottle)	3 (1 tall bottle)	3 (1 tall bottle)	3 (1 tall bottle)	1 (Tall Bottle)	1 (Tall Bottle)
airy compartment	•	•	•	•	•	•	•	•
iterior light system	Single	Single	Single	Dual	Dual	Dual	Dual	Dual
uiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Premium	Premium
leverClean condenser	•	•	•	•	٠	•	•	•
REEZER FEATURES rostGuard technology				•	•	•		•
Iultiflow air system (freezer)			-	•	•	•	•	•
/ire cabinet shelves	-	1 step	1 step	1 F/W (2 pos.)	1 F/W (2 pos.)	1 F/W (2 pos.)	1 F/W (2 pos.)	1 F/W (2 pos.)
Vire tilt-out door bin(s)	-	-	- '	-	•	•	•	•
pillproof freezer floor	-	-	-	•	•	•	•	•
oor bins	2	2	2	2 (1 Adj.)	2 (1 Adj.)	2 (1 Adj.)	2 (1 Adj.)	2 (1 Adj.)
nterior light	-	-	-	•	•	•	•	•
XTERIOR							00 / H H H	CC /1101/
olour(s) available	WW	WW	WW	WW	ww	WW	ss/ww	SS/WW
tainless steel model	-	-	-	•	•	-	•/-	•/-
ustomer installed handles oor handles	- Colour matched	- Colour matched	- Colour matched	• Colour matched	• Colour matched	Colour matched	Sculptured SS / CM	Sculptured SS / C
kterior design	Squared Doors	Squared Doors	Squared Doors	Rounded Doors	Rounded Doors	Rounded Doors	Rounded Doors	Rounded Doors
extured steel door and case	•	•	•	•	•	•	Case only (black) / •	Case only (black)
eversible doors	•	•	•	•	•	•	•	•
djustable rollers	Front	Front	Front	Front	Front	Front	Front	Front
EIGHTS & DIMENSIONS								
eight to top of hinge (mm) A	1569	1569	1645	1715	1715	1743	1715	1743
eight to top of case (mm)	1556	1556	1632	1699	1699	1724	1699	1724
ase depth without door (mm) B	658	658	658	702	702	702	702	702
ase depth less door handle (mm) C	740	740	740	804	804	804	804	804
use depth with door handle (mm) E	782	782	782	854	854	854	854	854
epth w/ FF door open 90° (mm) D	1394 712	1394 712	1394 712	1600 835	1600 835	1677 912	1600 835	1677 912
idth (mm) F 'door handle (mm)	712	712 775	712 775	835	835	912 966	835	912
r clearances Each side (mm)	3	3	3	3	3	3	3	3
p (mm)	25	25	25	25	25	25	25	25
ack (mm)	25	25	25	25	25	25	25	25
roduct weight (kg)	69 / 76	69 / 76	78	104	104	125	104	125
JNCTIONAL CHARACTERISTICS								
ower	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50H
nergy class	В	В	В	В	В	В	В	В
nergy usage (kW/year)	616	616	635	744	744	815	744	815
O temperature rise time (hours)	14,9	14,9	14,3	17,5	17,5	15,3	17,5	15,3
reezing Capacity (kg/24h) limate Class	5 N (16°C - 32°C)	5 N (16°C - 32°C)	5 N (16°C - 32°C)	8 N (16°C - 32°C)	8 N (16°C - 32°C)	8 N (16°C - 32°C)	8 N (16°C - 32°C)	8 N (16°C - 32°C)

(*) SS= Stainless steel, WW= White

BRAND		PROFILE	PROFILE	PROFILE	PROFILE
BRAND		PROFILE	PROFILE	PROFILE	PROFILE
220-240V / 50Hz - Schuko Plug		PTG570SATRSS PTW570SATRSS PTX570SATRSS	PTG530SATRSS	PTG470SATRSS PTX470SATRSS	PTG440SATRSS
220-240V / 50Hz - UK Plug		PTN570SATRSS	PTN530SATRSS	PTN470SATRSS	PTN440SATRSS
ISO CAPACITY (GROSS / NET)					
Total (litres)		565 / 527	527 / 482	463 / 426	427 / 393
Fresh food (litres)		406 / 388	368 / 343	336 / 315	300 / 282
Freezer (litres)		159 / 139	159 / 139	127 / 111	127 / 111
REFRIGERATOR COMPARTMENT					
Multi Air-flow		•	•	•	•
Shelves		Spillproof Glass	Spillproof Glass	Spillproof Glass	Spillproof Glass
Chilled Room / Case		•	•	•	•
Door Bins		Clear	Clear	Clear	Clear
Deodorizer		•	•	•	•
Clear vegetable crisper		•	•	•	•
FREEZER COMPARTMENT					
Shelf		Clear Plastic	Clear Plastic	Clear Plastic	Clear Plastic
Ice Tray		Twist	Twist	Twist	Twist
EXTERIOR					
Configuration		Top Freezer	Top Freezer	Top Freezer	Top Freezer
Refrigeration Performance		****	****	****	****
CFC-free		•	•	•	•
Door Design		Contour	Contour	Contour	Contour
Handle Design		Full Length Tubular	Full Length Tubular	Full Length Tubular	Full Length Tubular
Handle Colour		Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Cabinet Colour		Silver	Silver	Silver	Silver
DIMENSIONS (mm)					
Width (mm)	F	754	754	674	674
Height (mm)	Α	1802	1702	1776	1676
Depth incl. doors & handles (mm)	E	834	834	758	758

Dimensions







Refrigeration Specialty Technical Specifications Accompanies the Refrigeration 2009 brochure





Specialty Technical Specifications



BRAND	GE	GE		
MODEL N° EXTERIOR STYLE	FUG17DSRWH Upright freezer	FUG20DSRWH Upright freezer		
ISO CAPACITY (GROSS / NET)				
Total (litres)	467	568		
Shelf Area (litres)	515	669		
FEATURES				
Defrost Type	Frost Free	Frost Free		
Adjustable Temperature Control	•	•		
Cabinet Shelves	4 (3 Adj.)	5 (3 Adj.)		
Door Shelves Total	5 (2 juice shelves)	6 (2 juice shelves)		
Wrap-Around Condenser	•	•		
Wrap-Around Evaporator	•	•		
Defrost Water Drain	Not Required	Not Required		
Power "On" Light	•	•		
Interior Light	•	•		
Lock	•	•		
Slide out Storage Baskets	1	1		
Magnetic Door Gasket	•	•		
Cabinet Liner	Baked Enamel on Steel	Baked Enamel on Steel		
EXTERIOR				
Colour Available	White	White		
	New Design	New Design		
Handle Textured Steel Case and Door	New Design •	New Design •		
Textured Steel Case and Door WEIGHTS & DIMENSIONS		New Design •		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm)	• 1639	• 1778		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm)	• 1639 813	• 1778 813		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm)	• 1639 813 673	• 1778 813 724		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm) Depth with door open (mm)	• 1639 813 673 1450	• 1778 813 724 1501		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm) Depth with door open (mm)	• 1639 813 673	• 1778 813 724		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm) Depth with door open (mm)	• 1639 813 673 1450	• 1778 813 724 1501		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm) Depth with door open (mm) Air clearances Each side (mm)	• 1639 813 673 1450 76	• 1778 813 724 1501 76		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm) Depth with door open (mm) Air clearances Each side (mm) Back (mm)	• 1639 813 673 1450 76	• 1778 813 724 1501 76		
Textured Steel Case and Door WEIGHTS & DIMENSIONS Height (mm) Width (mm) Depth (mm) Depth with door open (mm) Air clearances Each side (mm) Back (mm) FUNCTIONAL CHARACTERISTICS	• 1639 813 673 1450 76 76 76	• 1778 813 724 1501 76 76		



BRAND	GE	GE	GE	GE	GE	GE
MODEL N°	GAQ2SAMRBS GAQ2BWMRWW	GAQ3SAMRBS GAQ3BWMRWW	GAQ5BWMRWW GAQ5SAMRBS	GAX2SAMRBS GAX2BWMRWW	GAX3SAMRBS GAX3BWMRWW	GAX5BWMRWW GAX5SAMRBS
EXTERIOR STYLE	Compact Fridge	Compact Fridge				
ISO CAPACITY (GROSS / NET)						
Total (litres)	50	65	130	50	65	130
FEATURES						
Air system	Direct cooling	Direct cooling				
Freezer compartment	Ice cube tray only	Ice cube tray only	•	Ice cube tray only	Ice cube tray only	•
Vegetable/Fruit crisper	-	-	1 clear	-	-	1 clear
Wire shelves (plastic coated steel)	1	2	2	1	2	2
Can slot in door	-	-	•	-	-	•
EXTERIOR						
Case colour	Black smooth / White smooth	Black smooth / White smooth	White smooth / Black smooth	Black smooth / White smooth	Black smooth / White smooth	White smooth / Black smooth
Door colour	Stainless Steel (inox) / White smooth	Stainless Steel (inox) / White smooth	White smooth / Stainless Steel (inox)	Stainless Steel (inox) / White smooth	Stainless Steel (inox) / White smooth	White smooth /Stainless Steel (ino)
Door handle	Concealed pocket	Concealed pocket				
Reversible door	•	•	•	•	•	•
WEIGHTS & DIMENSIONS						
Height (mm)	486 / 530	636 / 680	836 / 885	486 / 530	636 / 680	836 / 885
Depth (mm)	485 / 560	485 / 555	532 / 585	485 / 560	485 / 555	532 / 585
Width (mm)	470 / 495	470 / 495	520 / 570	470 / 495	470 / 495	520 / 570
Weight (kg)	18.5 / 21	22 / 25	30 / 32.5	18.5 / 21	22 / 25	30 / 32.5
GENERAL CHARACTERISTICS						
Temperature control	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Temperature range (°C)	0-10	0-10	0-10	0-10	0-10	0-10
CFC free	•	•	•	•	•	•
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
FUNCTIONAL CHARACTERISTICS						
Power	220-240V / 50Hz	220-240V / 50Hz				
Plug Type	British	British	British	Euro	Euro	Euro



GE Appliances Europe-Middle East-Africa Kouterveldstraat, 2 B-1831 Diegem Belgium

www.geappliances-europe.com info.geappliances-europe@ge.com GE has a policy of continuous improvement of its products and reserves the rights to change materials and specifications without notice. The specifications on the rating plate of our product are accurate. All photographs shown in this catalog are noncontractual.

© 2008 General Electric Company



GE imagination at work