

GoLanTec


Energietechnik



E100: ECO 8W ; < 31 dB

20/8/2012

Axial bathroom and toilet fans
E100 high energy efficiency

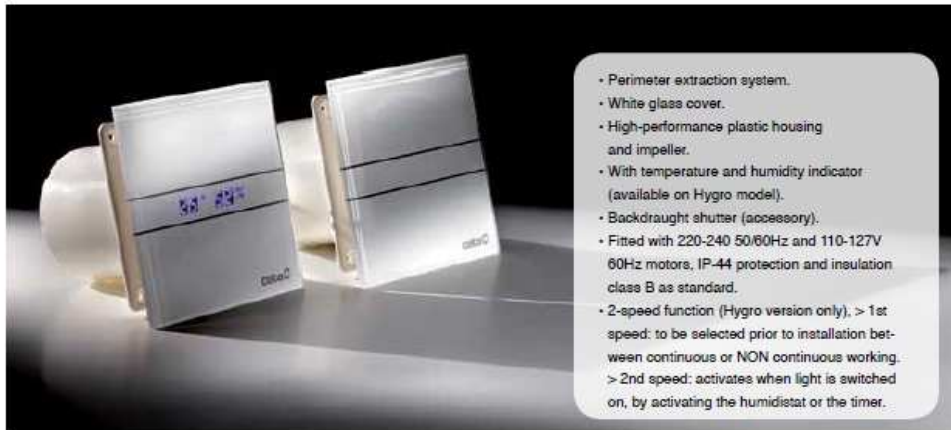

- Perimeter extraction system.
- White glass cover.
- High-performance plastic housing and impeller.
- With temperature and humidity indicator (available on Hygro model).
- Backdraught shutter (accessory).
- Fitted with 220-240 50/60Hz and 110-127V 60Hz motors, IP-44 protection and insulation class B as standard.
- 2-speed function (Hygro version only), > 1st speed: to be selected prior to installation between continuous or NON continuous working. > 2nd speed: activates when light is switched on, by activating the humidistat or the timer.

REMOVABLE WHITE GLASS FRONT



EASILY REMOVABLE


Easy and speedy removal of the cover using a single tool (included in the packaging) which is also used to adjust the timer (GT and GTH version) and the humidistat (GTH version).

EASY TO CLEAN

Extra-flat white glass cover that is easy to clean just by running a damp cloth over it.

CODE	MODEL	EAN CODE	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum Airflow (m³/h)	Sound Pressure Level dB(A)	Units per box
00900000	E-100 G	8422248049610	●	100	220-240	2600	8	115-32	31	6
00900100	E-100 GT	8422248049627	●	100	220-240	2600	8	115-32	31	6
00900200	E-100 GTH	8422248049634	●	100	220-240	1 st veloc. - 1100 2 nd veloc. - 2600	4 8	36-10 115-32	17 31	6

DIMENSIONS mm



Versions



STANDARD
In combination with light, fans switches on.



HYGRO
Adjustable humidity detector from 40% to 95%, and adjustable electronic timer from 0 seconds to 15 minutes.



TIMER
Electronic timer adjustable from 3 to 15 minutes.

E-100 G	, - €
E-100 GT	, - €
E-100 GTH	, - €
Transport per GLS	25,-€

GoLanTec
Energietechnik

Perfecte technologie, daar komt het op aan

Oudenaardseweg 123, B 9790 Wortegem-Petegem

Tel: 055 310242 Fax: 055 310242

golantec@gmail.com

<http://www.golantec.be>