


# DOMESTIC FANS

## Axial bathroom and toilet fans E100 high energy efficiency




**HIGH ENERGY EFFICIENCY**

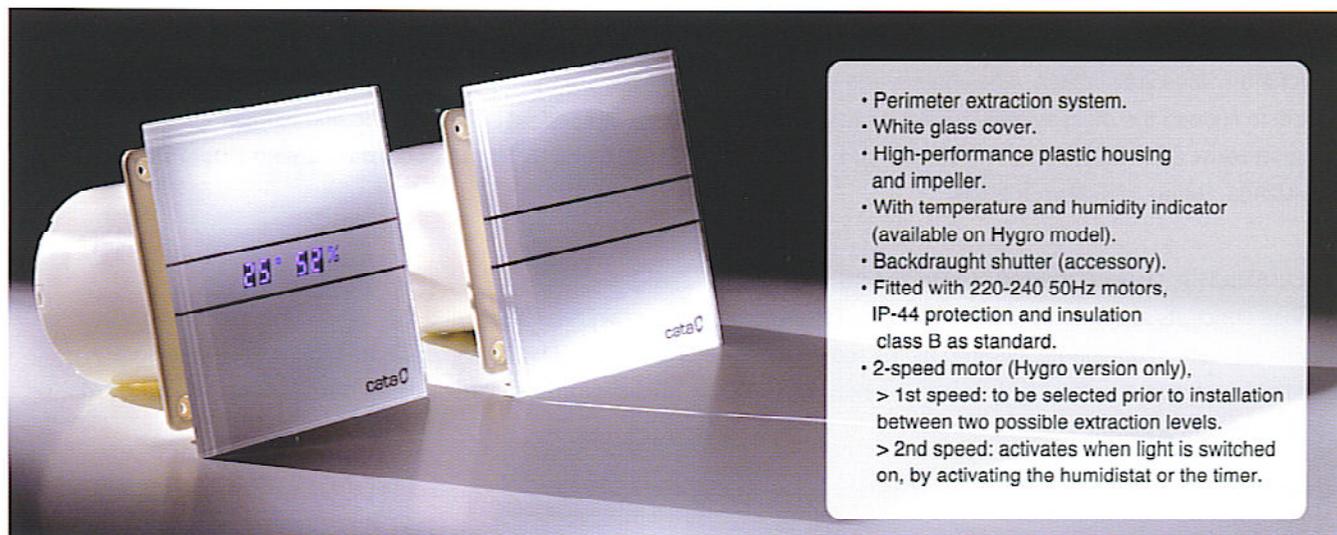

- Perimeter extraction system.
- White glass cover.
- High-performance plastic housing and impeller.
- With temperature and humidity indicator (available on Hygro model).
- Backdraught shutter (accessory).
- Fitted with 220-240 50Hz motors, IP-44 protection and insulation class B as standard.
- 2-speed motor (Hygro version only).
  - > 1st speed: to be selected prior to installation between two possible extraction levels.
  - > 2nd speed: activates when light is switched on, by activating the humidistat or the timer.

### REMOVABLE WHITE GLASS FRONT

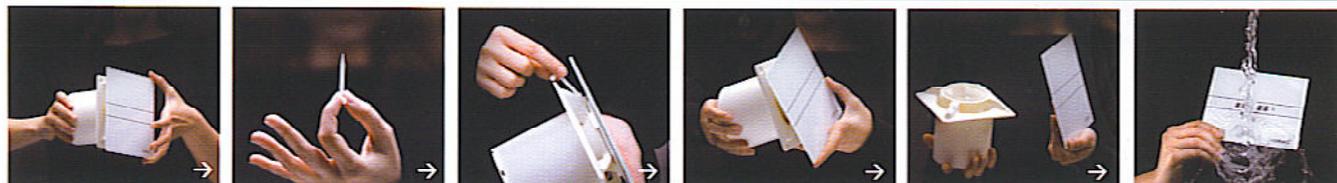

#### EASILY REMOVABLE

Easy and speedy removal of the cover using a single tool (included in the packaging) which is also used to adjust the timer (GT and GTH version) and the humidistat (GTH version).


#### EASY TO CLEAN

Extra-flat white glass cover that is easy to clean just by running a damp cloth over it.

CODE	MODEL	VERSION	Ø (mm)	VOLTAGE (V)	SPEED (r.p.m)	INPUT POWER (W)	MAXIMUM AIRFLOW (m³/h - l/s)	SOUND PRESSURE LEVEL dB(A)	UNITS PER BOX
00900000	E-100 G	●	100	220-240	2600	8	90-25	31	6
00900100	E-100 GT	●	100	220-240	2600	8	90-25	31	6
00900200	E-100 GTH	●	100	220-240	1 <sup>st</sup> veloc. - 1100*	4	36-10	17	6
					veloc. - 1800**	5	58-16	21	
					2 <sup>nd</sup> veloc. - 2600	8	90-25	31	

\* continuous extraction level indicated for installation in bathrooms / \*\* continuous extraction level indicated for installation in kitchens

### DIMENSIONS mm

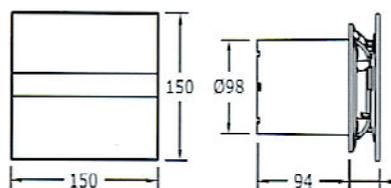

### Versions



#### STANDARD

In combination with light, fans switches on.



#### TIMER

Electronic timer adjustable from 3 to 15 minutes.



#### HYGRO

Adjustable humidity detector from 40% to 90%, and adjustable electronic timer from 40 seconds to 15 minutes.