

Centrifugal extract fan for kitchens.

PROFESSIONAL 750/750L/500



- High air flow capacity.
- Fitted with high-performance centrifugal impeller.
- Metal grease filter.
- Very easy to install and clean.
- 750 model with metal housing and plastic impeller.
- 500 model with plastic housing and impeller.

PROFESSIONAL 750/750L


PROFESSIONAL 500

CODE	MODEL	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m ³ /h – l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
00117400	PROFESSIONAL 500	100	230	1.900	150	450	57	2,09	4
00117000	PROFESSIONAL 750	120	230	1.200	125	700	49	5	3
00117100	PROFESSIONAL 750 L	120	230	1.200	125	700	49	5	3


DIMENSIONS mm

	A	B	C	D	E	Ø F
PROFESSIONAL 750/750L	465	425	356	235	40	11
PROFESSIONAL 500	330	370	280	173	40	89

PROFESSIONAL 750/750 L

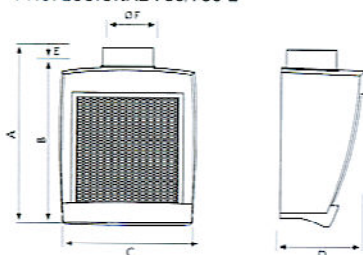

PROFESSIONAL 500

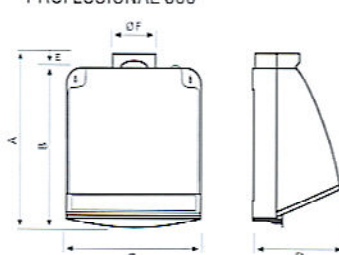

Centrifugal kitchen extractors with side smoke outlet.

600 PLUS 2V / GS 600




- High air flow capacity.
- Metal housing and high-performance plastic impeller.
- Grease collector tray.
- Very easy to install and clean.
- The 600 Plus model includes a 2-speed switch that can be installed on the wall.
- Metallic grease filter 600 Plus model and protective grill GS 600 model.

600 PLUS 2V

GS 600

CODE	MODEL	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m ³ /h – l/s)	Sound Pressure Level dB(A)	Weight (Kg)	Units per Box
00116110	600 PLUS 2 VEL.	120	230	1.185	105	420/600	52	4	4
00116002	GS-600	110	230	1.180	105	480	50	4,8	4

DIMENSIONS mm

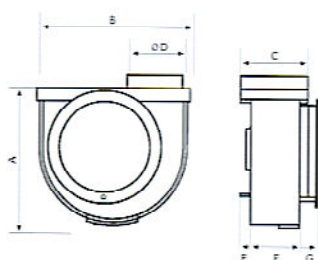

	A	B	C	Ø D	E	F	G
600 PLUS 2 Vel.	312	355	127	118	26	88	20
GS 600	310	375	124	110	26	90	20